



 **BRADY**

S3700

**Professional Grade.
Premium Experience.**

Get enhanced capabilities for a flawless facility

MULTICOLOR + CUT SIGN AND LABEL PRINTER

Bold multicolor. Precision shape cutting.


SMOOTHER OPERATIONS

Because safety and efficiency are the pulse of your operations, you need an industrial label printer that delivers both. Put multicolor brilliance, transformative shape cutting and seamless create-and-print capabilities at the heart of your labeling. Empower any user to make signs, labels and tags for just about any application. Let your labeling take shape with the BradyPrinter S3700 Multicolor & Cut Sign and Label Printer.



Mono or multicolor, delivered in seconds

Easily print the colors you need. Smarter print technology enables simple 20-second changeovers of ribbons and labels for safety identification, Lean visuals, work-in-process labels and more that pop — quickly, reliably.



Flawless shapes, letters, arrows and more

Transform the way you label with straighter lines, smoother curves and tighter connection points thanks to the precision XY plotter cutter. Plus, stack pipe markers and pack multiple shapes per label to minimize waste.



Extra-easy create and print

Now everyone can work how and where they work best with time-saving onboard templates, intuitive PC labeling software and a mobile app.



 **BRADY**

BradyPrinter S3700

DANGER
HIGH VOLTAGE
KEEP OUT

▶ Learn more at BradyID.com/S3700
or scan to watch the overview video



BETTER STARTS WITH BRADY

The performance you need. From the name you trust.

KEY FEATURES



Precise shape cutting

- ▶ Straighter lines
- ▶ Rounder circles
- ▶ Tighter connection points
- ▶ Pipe markers can be stacked and multiple shapes packed closer together



Durable multicolor made easy

- ▶ Easy-change, drop-lock print ribbons and labels
- ▶ No-change multicolor print ribbons
- ▶ Compliance-driving safety colors
- ▶ Impactful labels durable up to 10 years




Automatic label setup

- ▶ No calibrating, no threading
- ▶ Printer auto-IDs material, sets accurate burn settings and speed
- ▶ 20-second material changeovers
- ▶ Print ribbon lasts up to 60% longer thanks to auto adjustments



Blazing-fast print speed — up to 5 in. per second!

- ▶ Any size job delivered fast
- ▶ Streamlines print queues and minimizes bottlenecks

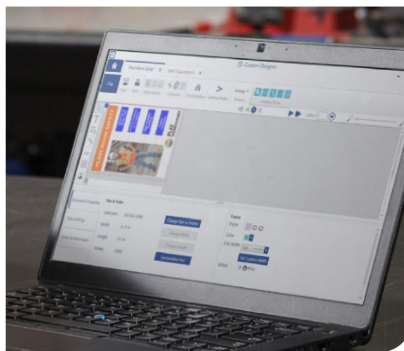

Works how you work best

- ▶ Enables any user to create almost any label or sign
- ▶ Multiple ways to create and connect: onboard, PC or app
- ▶ PC labeling software for next-level label creation
- ▶ Wi-Fi and Bluetooth ready
- ▶ Mobile app for assessing needs and creating labels on the move



Walk-up-and-print convenience

- ▶ Time-saving onboard templates
- ▶ No design expertise needed
- ▶ Right labels, right when you need them

S3700 | MULTICOLOR + CUT SIGN AND LABEL PRINTER

POWERFUL, PRECISE PRODUCTION

With the ability to print in multicolor on a wide variety of material types and sizes, plus cut shapes, letters and more, this printing system will leave you wanting for nothing — except maybe more labeling jobs.

Easy-access latch

Allows immediate access to all serviceable internal parts

Auto cutter

Cuts off material after a job, after a label or not at all

Installed parts display

Provides a quick snapshot of what's in, and what's not





Integrated label library

Onboard label templates and 600 pre-programmed barcodes and symbols

Multiple ways to connect

Wi-Fi and Bluetooth enabled, two USB ports and ethernet ready

User-friendly tilt display

Full-color, 6-in. touchscreen and fast processor

Onboard input

Full-size QWERTY keyboard folds out of the printer body

SERIOUS PRODUCTIVITY

fueled by Brady technology

Manage the demands of your day with a printer that takes on the tough work. Take a look under the hood at the automating, time-saving, headache-eliminating features all designed to make every print job flawless, faster.

Media wiper

Ensures clean finished labels and catches dust so your printer runs stronger


Media guides and integrated sensors

Sensors automatically align when guides squeeze together — no trial-and-error adjustments

Precise XY plotter cutter

Smoother curves, tighter connection points, straighter lines and more shapes per label



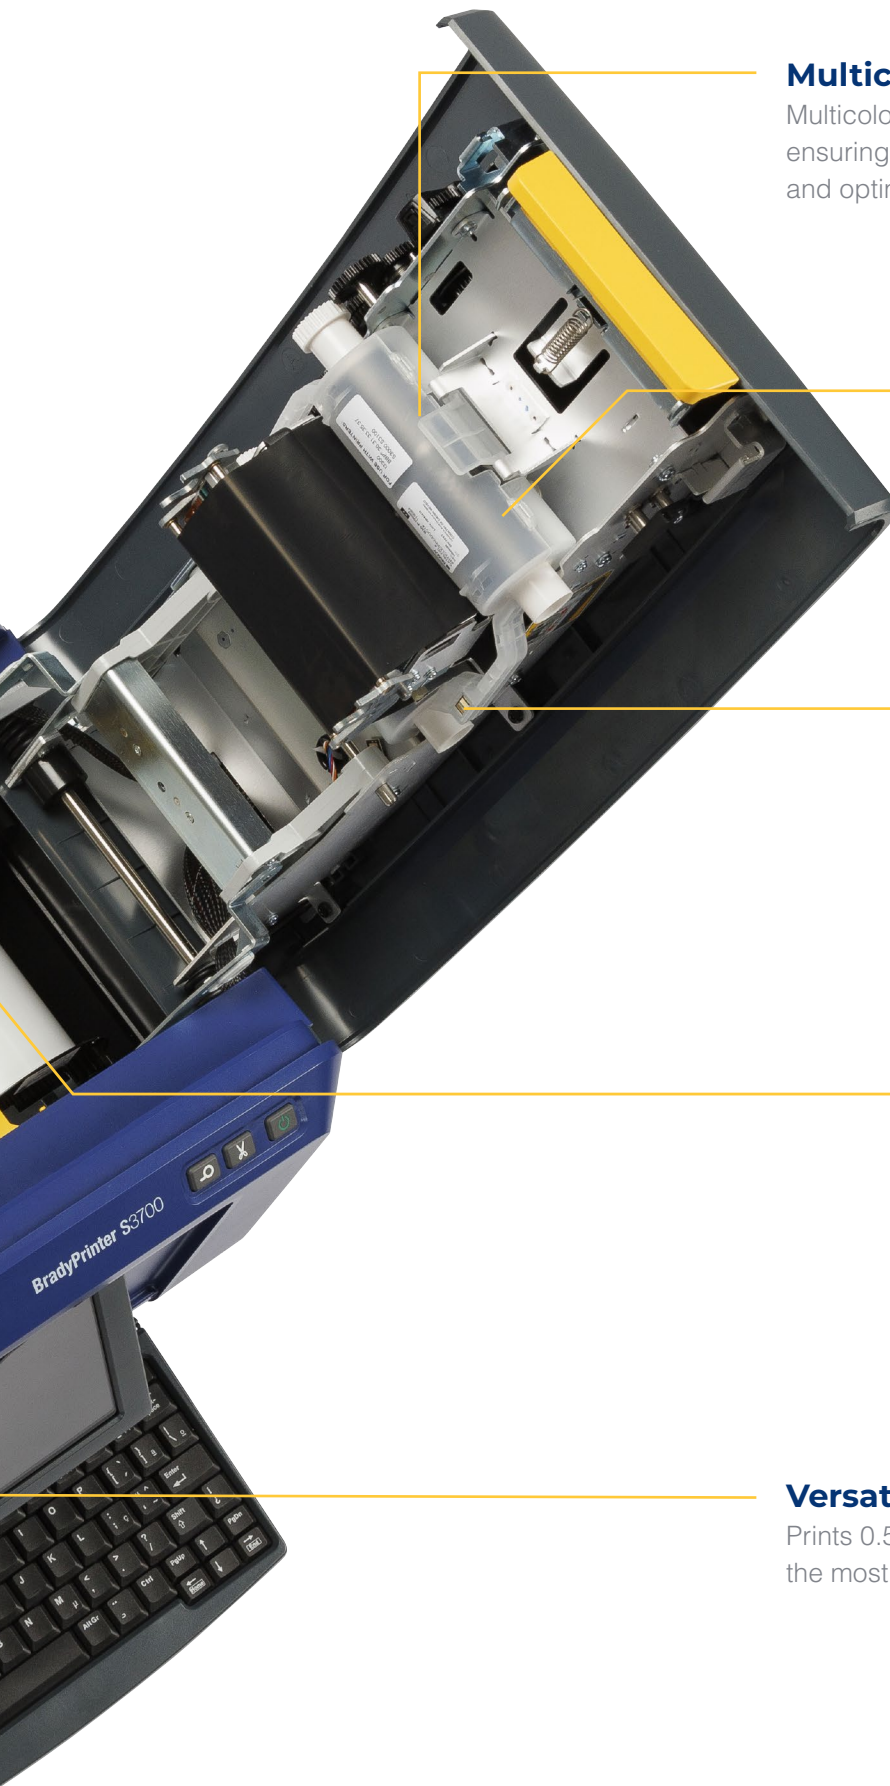

Multicolor optimized

Multicolor panel ribbons reduce changeovers, ensuring faster printing, reduced material waste and optimal efficiency

Fine-tuned ribbon control

Ribbon cartridges last up to 60% longer thanks to smarter print technology

Smart media rolls

Brady technology auto-sets speed, size, heat, layout and ribbon/material pairing

Easy label and ribbon loading for 20-second changeovers

Simply drop in with no thread-through, sensor adjustment, calibration or wasted labels

Versatile label widths

Prints 0.5-to-4-in.-wide labels on a wide array of the most durable materials around

THE RIGHT TECHNOLOGY

from the right partner

The S3700 printer, now with cutting-edge Brady print technology

Get advanced print performance with time-saving, cost-reducing technology built into every S3700. Designed as a system (printer, ribbon, materials), each part “talks” to the other and enables many automatic functions. Auto setup and part recognition save you time, and auto adjustments help **ribbon cartridges last up to 60% longer**.



Faster setup

Set up your S3700 in seconds. Just drop in your ribbon and label roll. The printer recognizes built-in smart cell chips, allowing for fast setup.



Easier printing

Loaded with time-saving features, label templates and an intuitive interface, the S3700 offers easy operation for any application.



Less waste

Thanks to auto calibration and setup, the S3700 prints on the very first label. That eliminates frustrating trial and error, and expensive waste.



LABEL CREATION

for how you work best

Streamline your labeling with easy-to-use software and apps purpose-built to work with your Brady printer. Our powerful label creation options empower you to design, manage and print labels with unmatched ease and efficiency.



Empower every user

Intuitive, user-friendly interfaces make label design accessible for all skill and experience levels.



Enhance safety and compliance

Ensure clear communication of life-saving information and create labels that meet industry standards and regulations with ease.



Boost productivity

Eliminate manual errors and accelerate label production with solutions that streamline the entire create-and-print process.




Maximize flexibility

From the power of Brady Workstation to the convenience of Express Labels Mobile, our solutions adapt to unique needs and workflows.




Brady Workstation Labeling Software

Get everything you need to create the right label fast.

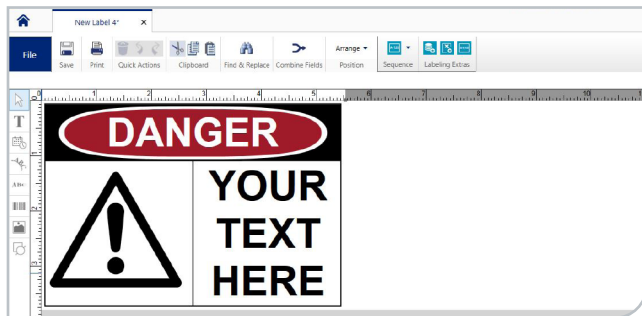


Premade label layouts

Print common labels custom-worded to your needs.

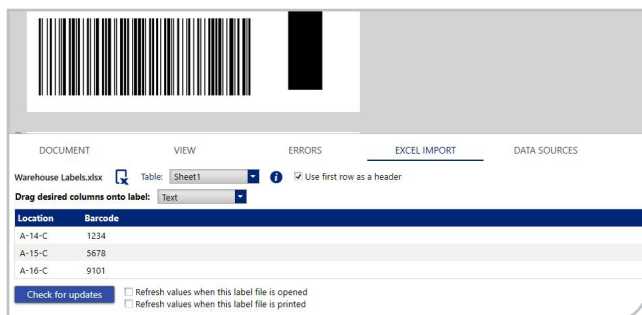


Importing and sequencing

Import data from spreadsheets and create labels based on numeric and alphanumeric sequences.

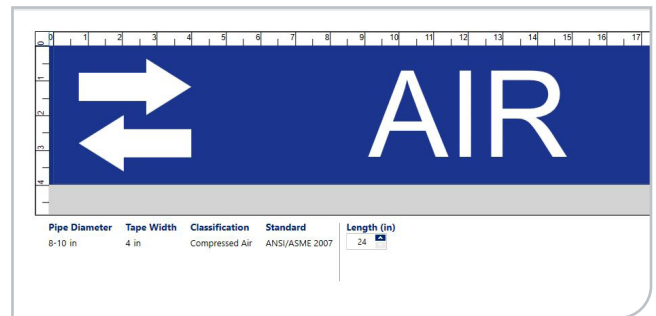

Regulatory labeling

Access intuitive templates for pipe markers, GHS labels, safety signs, arc flash labels and more.

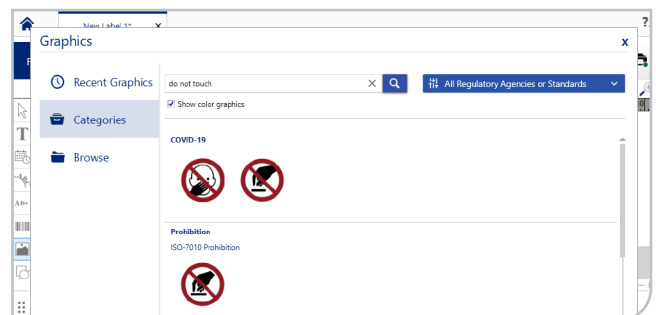

Accessible graphics library

Search and filter by keyword, regulation or agency.

Express Labels Mobile App

Go mobile and get more options on-demand, on-site and off.

- ▶ 20+ barcode types
- ▶ 1400+ symbols across 18 categories
- ▶ Label saving and sharing
- ▶ Real-time printer status
- ▶ 30+ supported languages
- ▶ 10+ label designs
- ▶ 85 fonts
- ▶ Data entry options
- ▶ Accurate print preview
- ▶ Full label editor

PROFESSIONAL GRADE

Premium Experience

Faster speeds. More options. Smoother operations.



S3700 Multicolor & Cut Sign and Label Printer

The S3700 offers a number of time- and cost-saving benefits:

- ▶ Quickly change over materials in under 20 seconds
- ▶ Print on the first label – no calibration required
- ▶ Built-in XY cutter slices shapes and letters flawlessly
- ▶ Multicolor optimized for more impactful labels, signs and tags
- ▶ Prints on a wide variety of labels up to 4-in. wide



The S3700 easily integrates with your existing systems and platforms — but only **Brady Workstation Label Creation and Management Software** truly maximizes the full potential of your printing experience.

Catalog

S3700-WB BradyPrinter S3700 Multicolor & Cut Sign and Label Printer

The above part number descriptions do not reflect complete product data — refer to the specification sheet for complete details.
S3700 printers accept the B30 series version V2 media.

Printer ships with Brady Workstation label creation software, power and USB cords, cleaning kit, QuickStart Guide and USB user manual, Windows driver and how-to videos.



Simple. Durable. Reliable.

Single color printing for durability, clarity and consistency

S3100 Sign and Label Printer

No need for shapes or multicolor? Try the S3100, with a user-friendly touch-screen interface for standalone use. Consistently get the job done right every time with this reliable printer. Simply walk up. Print. Done.

BUNDLE & SAVE WITH KITS

Need your printer for specific applications? Bundle your S3700 with the labels and ribbons you'll need, and enjoy significant savings compared to purchasing items separately.

Color Kit

S3700-KIT-COLOR BradyPrinter S3700 Multicolor & Cut Sign and Label Printer with Color Label Materials Kit

(1) Brady Workstation Safety and Facility ID Software (BWS-SFIDS-NA-EM), (1) Cleaning Kit (PCK-6), (1) Mouse, (1) Power Cord, (1) Quick Start Guide, (1) S3700 Safety and Facility Printer (S3700-WB), (1) USB Cord, (1) USB Flash Drive, (1) B30C-4000-595-WT, (1) B30C-4000-595-BL, (1) B30C-4000-595-GN, (1) B30C-4000-595-RD, (1) B30C-4000-595-YL, (1) B30-R10000, (1) B30-R10000-WT



Starter Kit

S3700-KIT-STARTER BradyPrinter S3700 Multicolor & Cut Sign and Label Printer with Label Materials Kit

(1) Brady Workstation Safety and Facility ID Software (BWS-SFIDS-NA-EM), (1) Cleaning Kit (PCK-6), (1) Mouse, (1) Power Cord, (1) Quick Start Guide, (1) S3700 Safety and Facility Printer (S3700-WB), (1) USB Cord, (1) USB Flash Drive, (1) B30C-4000-595-WT, (1) B30C-2250-595-WT, (1) B30C-1125-595-WT, (1) B30C-4000-595-YL, (1) B30C-2250-595-YL, (1) B30-25-595-BLNKWT, (1) B30-255-851-WHT, (2) B30-R10000, (1) B30-R10000-WT, (1) B30-R10000-RD



Lean/5S Kit

S3700-KIT-LEAN BradyPrinter S3700 Multicolor & Cut Sign and Label Printer with Lean/5S Label Materials Kit

(1) Brady Workstation Safety and Facility ID Software (BWS-SFIDS-NA-EM), (1) Cleaning Kit (PCK-6), (1) Mouse, (1) Power Cord, (1) Quick Start Guide, (1) S3700 Safety and Facility Printer (S3700-WB), (1) USB Cord, (1) USB Flash Drive, (1) B30C-4000-595-WT, (1) B30C-2250-595-WT, (1) B30C-4000-595-YL, (1) B30C-2250-595-YL, (1) B30-219-595-BLNKWT, (1) B30C-2500-509-WT, (1) B30C-4250-509-WT, (1) B30C-2250-483YL-KT, (1) B30-R10000, (1) B30-R10000-WT, (1) B30-R10000-RD, (1) B30-R10000-BL, (1) B30-R10000-KRYG-8



GHS Kit

S3700-KIT-GHS BradyPrinter S3700 Multicolor & Cut Sign and Label Printer with GHS Label Materials Kit

(1) Brady Workstation Safety and Facility ID Software (BWS-SFIDS-NA-EM), (1) Cleaning Kit (PCK-6), (1) Mouse, (1) Power Cord, (1) Quick Start Guide, (1) S3700 Safety and Facility Printer (S3700-WB), (1) USB Cord, (1) USB Flash Drive, (1) B30-262-7569-CLP4B, (1) B30-260-7569-CLP4B, (2) B30-R10000



Arc Flash Kit

S3700-KIT-ARC BradyPrinter S3700 Multicolor & Cut Sign and Label Printer with Arc Flash Label Materials Kit

(1) Brady Workstation Safety and Facility ID Software (BWS-SFIDS-NA-EM), (1) Cleaning Kit (PCK-6), (1) Mouse, (1) Power Cord, (1) Quick Start Guide, (1) S3700 Safety and Facility Printer (S3700-WB), (1) USB Cord, (1) USB Flash Drive, (1) B30-25-595-ANSIWA, (1) B30EP-174-593-WT, (1) B30C-2250-595-OR, (2) B30-R10000



Pipe Marker Kit

S3700-KIT-PIPE

BradyPrinter S3700 Multicolor & Cut Sign and Label Printer and Pipe Marker Label Materials Kit

(1) Brady Workstation Safety and Facility ID Software (BWS-SFIDS-NA-EM), (1) Cleaning Kit (PCK-6), (1) Mouse, (1) Power Cord, (1) Quick Start Guide, (1) S3700 Safety and Facility Printer (S3700-WB), (1) USB Cord, (1) USB Flash Drive, (1) B30C-4000-595-YL, (1) B30C-2250-595-YL, (1) B30C-4000-595-GN, (1) B30C-2250-595-GN, (1) B30C-4000-595-RD, (1) B30C-2250-595-RD, (1) B30C-4000-595-BL, (1) B30C-2250-595-BL, (1) B30C-4000-595-WT, (1) B30-R10000, (3) B30-R10000-WT



Lockout Tagout Kit

S3700-KIT-LOTO

BradyPrinter S3700 and Lockout Tagout Materials Kit for LINK360 Software (LINK360 Sold Separately)

(1) 3" x 100 Ft White Outdoor Vinyl (B30C-3000-595-WT), (1) 3.25" x 5.75" OSHA DANGER Polyester Tags (B30-255-851-OSHADA), (1) 4.33" x 200 FT R10000 Black Printer Ribbon (B30-R10000), (1) 4.33" x 200 FT R10000 Red Printer Ribbon (B30-R10000-RD), (1) S3700 PRINTER QWERTY - NA, WIFI/BT (S3700-WB)



Lockout Tagout Kit with LINK360® Safety Software

S3700-KIT-LINK360

LINK360 Safety Software with BradyPrinter S3700 and Lockout Tagout Materials Kit

(1) 3" x 100 Ft White Outdoor Vinyl (B30C-3000-595-WT), (1) 3.25" x 5.75" OSHA Polyester Tags Danger (B30-255-851-OSHADA), (1) 4.33" x 200 FT R10000 Black Printer Ribbon (B30-R10000), (1) 4.33" x 200 FT R10000 Red Printer Ribbon (Red) (B30-R10000-RD), (1) LINK360® Starter Bundle (LINK360START), (1) S3700 PRINTER QWERTY - NA, WIFI/BT (S3700-WB)



M611 Label Printer Kit

S3700-M611-KIT


BradyPrinter S3700 Multicolor & Cut Sign and Label Printer Plus M611 Label Printer with Materials Kit

(1) Brady Workstation Safety and Facility ID Software (BWS-SFIDS-NA-EM), (1) Cleaning Kit (PCK-6), (1) Mouse, (1) Power Cord, (1) Quick Start Guide, (1) S3700 Safety and Facility Printer (S3700-WB), (1) USB Cord, (1) USB Flash Drive, (1) B30C-4000-595-WT, (1) B30C-4000-595-YL, (1) B30C-2250-595-WT, (1) B30C-2250-595-YL, (2) B30-R10000, (1) M61C-1000-595-WT, (1) M61C-1000-595-YL, (1) M61C-500-595-WT, (1) M61C-500-595-YL, (2) M61-R10010



PRINT RIBBONS

More options. Bigger impact. Extremely durable.

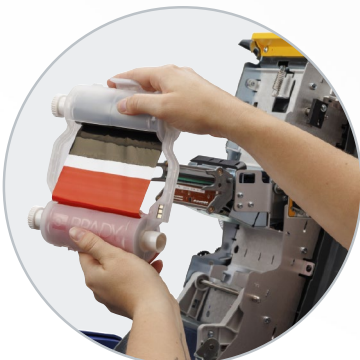

Multicolor panel ribbons

Choose from 2- and 4-color ribbons to simplify and reduce changeovers. Print more in multicolor for more impactful identification, less hassle and minimal waste.



Rapid ribbon changes

Get 5-second ribbon supply changes with drop-and-click technology. No calibrating, no threading and no waste. Each tough, smear-proof ribbon withstands years of industrial use.



5-second ribbon installation

- ▶ Tough, smear-proof ribbons produce long-lasting printed text and can withstand years in industrial areas and outdoor conditions
- ▶ Self-contained cartridges drop straight into printer with a “click”
- ▶ No calibrating, no threading, no wasted feeding, no hassles and the ink will always be facing the right direction
- ▶ Printer notifies user if installed ribbon is not recommended for installed labels

Single-Color Print Ribbons

- Solid color ribbons for printing a single color onto a label
- Can be swapped out for printing multicolor labels on the printer if a multicolor panel ribbon is not on hand



Catalog #	Color	Size Inch (mm)	Length Feet (m)
B30-R10000	Black	4.330 (109.9)	200 (60.9)
B30-R6000	Black	4.330 (109.9)	200 (60.9)
B30-R6200	Black	4.330 (109.9)	200 (60.9)
B30-R6400	Black	4.330 (109.9)	200 (60.9)
B30-R4300	Black	4.330 (109.9)	200 (60.9)
B30-R4900	Black	4.330 (109.9)	200 (60.9)
B30-R4400-WT	White	4.330 (109.9)	200 (60.9)
B30-R10000-WT	White	4.330 (109.9)	200 (60.9)

Catalog #	Color	Size Inch (mm)	Length Feet (m)
B30-R10000-RD	Red	4.330 (109.9)	200 (60.9)
B30-R10000-GN	Green	4.330 (109.9)	200 (60.9)
B30-R10000-BL	Blue	4.330 (109.9)	200 (60.9)
B30-R10000-YL	Yellow*	4.330 (109.9)	200 (60.9)
B30-R10000-OR	Orange	4.330 (109.9)	200 (60.9)

* B30-R10000-YL for printing yellow onto white.

Multicolor Panel Print Ribbons

- Ribbons have panels of 2 or 4 different colors for printing multiple colors onto a label
- Print multiple colors without having to swap in multiple ribbons



Two-Color Print Ribbons

Catalog #	Color	Size Inch (mm) x Inch (mm)	Length Feet (m)
8-in. panel length — Typical yield: 100 panel sets per roll			
B30-R10000-KR-8	Black and Red	4.330 (101.9) x 8.000 (203.2) Panels	200 (60.9)
B30-R10000-KB-8	Black and Blue	4.330 (101.9) x 8.000 (203.2) Panels	200 (60.9)
B30-R10000-KO-8	Black and Orange	4.330 (101.9) x 8.000 (203.2) Panels	200 (60.9)
16-in. panel length — Typical yield: 60 panel sets per roll			
B30-R10000-KR-16	Black and Red	4.330 (101.9) x 16.000 (406.4) Panels	200 (60.9)
B30-R10000-KB-16	Black and Blue	4.330 (101.9) x 16.000 (406.4) Panels	200 (60.9)
B30-R10000-KO-16	Black and Orange	4.330 (101.9) x 16.000 (406.4) Panels	200 (60.9)
B30-R10000-RB-16	Red and Blue	4.330 (101.9) x 16.000 (406.4) Panels	200 (60.9)

Four-Color Print Ribbons

Catalog #	Color	Size Inch (mm) x Inch (mm)	Length Feet (m)
8-in. panel length — Typical yield: 50 panel sets per roll			
B30-R10000-KRYG-8	Black, Red, Yellow and Green	4.330 (101.9) x 8.000 (203.2) Panels	200 (60.9)
B30-R10000-KRYB-8	Black, Red, Yellow and Blue	4.330 (101.9) x 8.000 (203.2) Panels	200 (60.9)
16-in. panel length — Typical yield: 30 panel sets per roll			
B30-R10000-KRYB-16	Black, Red, Yellow and Blue	4.330 (101.9) x 16.000 (406.4) Panels	200 (60.9)

Print Ribbon & Label Material Compatibility

To ensure the best legend permanence, all ribbons have been developed to meet the requirements of the materials to be printed on. Use the guide below to determine which ribbon series is recommended with your print materials.

●	Recommended ribbon for use with respective material.
UL	Materials are UL recognized with its respective ribbon.
CSA	Materials are CSA approved with its respective ribbon.

B-# material		B30-R4300	B30-R4900	B30-R6000	B30-R6200	B30-R6400	B30-R10000	B30-R4400-WT	B30-R10000-WT	B30-R10000*
B-423	Polyester	—	—	● UL / CSA	—	—	●	—	—	—
B-424	Paper	●	—	—	—	—	—	—	—	—
B-428	Metallized Polyester	● UL / CSA	—	—	—	—	—	—	—	—
B-432	Clear Polyester	—	UL	● UL / CSA	—	—	—	—	—	—
B-434A	Metallized Polyester	—	—	● UL / CSA	—	—	—	—	—	—
B-437	Polyvinylfluoride	●	—	—	—	—	—	—	—	—
B-437 YEL	Polyvinylfluoride	●	—	—	—	—	—	—	—	—
B-438	Metallized Polyester	● UL / CSA	—	—	—	—	●	—	—	—
B-443	Polyester	—	—	—	—	● UL / CSA	—	—	—	—
B-480	Polyester Rubber-Based Adhesive	—	—	●	—	—	—	●	—	—
B-483	Polyester	—	—	● UL / CSA	—	—	●	—	—	●
B-483A	ToughStripe® Polyester	—	—	●	—	—	●	●	—	●
B-484A	Polyester	—	—	● UL	—	—	—	—	—	—
B-486B	Metallized Polyester	● UL / CSA	—	—	—	—	—	—	—	—
B-488	Matte White Polyester	●	—	—	—	—	—	—	—	—
B-489A	Polyester	● UL / CSA	—	—	—	—	—	—	—	—
B-498	Repositionable Cloth	UL	—	—	● UL	—	—	—	—	—
B-509	Printable Magnetic	—	—	—	—	—	●	—	—	●
B-526	Photoluminescent Polyester	—	—	—	—	—	●	—	—	●
B-549	Polyester	—	—	—	—	—	●	—	—	●
B-551	Non-Adhesive Tag	—	—	—	—	—	●	—	—	●
B-565	Metallized Polyester	—	—	—	—	—	●	—	—	—
B-569	Polyester	—	—	—	—	—	●	—	●	●
B-581	Repositionable Vinyl	—	—	—	—	—	●	—	—	●
B-584	Reflective	—	—	—	—	—	●	—	—	●
B-593	Polyester	—	—	●	—	—	—	●	—	—
B-595	Outdoor Vinyl	—	—	—	—	—	●	—	●	●
B-724	Polyimide	●	—	—	—	—	—	—	—	—
B-727	Polyimide	—	—	● UL	—	—	—	—	—	—
B-787	Glossy White Polyvinyl Fluoride	—	—	●	—	—	—	—	—	—
B-851	Non-Adhesive Tag	—	—	—	—	—	●	—	—	●
B-854	ToughWash® Metal Detectable	—	—	●	—	—	●	—	—	●
B-855	ToughWash	—	—	●	—	—	—	—	—	—
B-7569	Vinyl Film	—	—	—	—	—	●	—	—	—

* Colored ribbons optimized for use on white material. Test use on other material colors for suitability to your application.

For further material compatibility related to UL/CSA, see pages 23-24 or refer to Brady Tech Data Sheet for complete material performance specifications

Making the IMPOSSIBLE POSSIBLE

An engine compartment label that won't burn. A food and beverage label that resists harsh washdowns and chemical sanitizers. A sign that lives in the elements for a decade and is still legible.


Every day, our scientists are tasked with making impossible situations possible, which is why we invest so heavily in research and development. Brady's patent portfolio is a direct reflection of our dedication to use science to solve for everything — from lubricants to solvents, freezing cold to blistering heat, and anything else your workplace can come up with.



Arc Flash



Panel & Enclosure ID

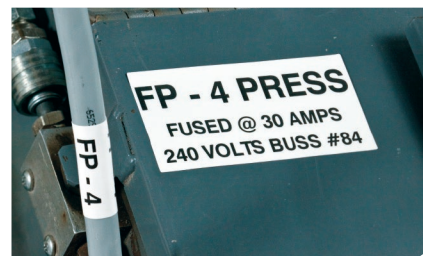

Equipment Labels




Equipment & LOTO Tags



GHS & Chemical



Lean/5S

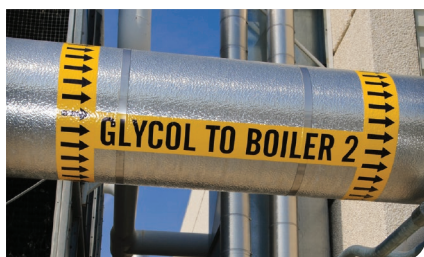

Pipe Markers



Safety Signs



Warning Labels



Barcode



Cut-Out Text & Shapes



Multicolor Labels

Materials for every application

Successful projects start (and end) with Brady materials. Optimum performance and durability are assured with each.

			Color	Permanent	Removable	Matte	Gloss	Service Temperature	Page #
B-423	Multi-Purpose Polyester	Polyester with a high-gloss finish and a permanent acrylic adhesive. Excellent image quality and widely used for barcoding, asset tracking, product labels and post-process PCB electronic component labeling. Adheres best to flat surfaces. UL-rated for surfaces commonly used in solar panel manufacturing.	○	•			•	-94° to 248°F	35, 36
B-424	Paper	Bright white paper label with a permanent latex adhesive. Excellent barcode read rates. Ideal for labeling applications requiring a low-cost, general-purpose labeling material.	○	•		•		-40° to 122°F	35, 38
B-428	Metallized Matte Polyester	Matte metallized polyester with a permanent adhesive. Light gray, matte appearance. Adheres best to flat surfaces. Ideal for rating plates on products and panels, and general-purpose product labels.	●	•		•		-40° to 293°F	35, 37
B-432	High Adhesion Multi-Purpose Clear Polyester	Clear polyester with a high-gloss finish and a stronger, 2-mil permanent acrylic adhesive. It has excellent imaging quality and is designed for flat surfaces that are textured or require increased adhesion.	⊙	•			•	-40° to 212°F	35
B-434	Metallized High Adhesion Polyester	Glossy metallized polyester with a stronger, 2-mil permanent adhesive. It has a high-gloss, silver appearance with excellent image quality. Adhesive is designed for flat surfaces that are textured or require increased adhesion. Ideal for rating plates, general-purpose product labels and asset tracking labels.	●	•			•	-40° to 194°F	35, 37
B-437	Self-Extinguishing Tedlar®	Heavy-duty Tedlar® label material with self-extinguishing features for wire and cable wrapping. It has excellent resistance to water, oil, chemicals and abrasion.	○●	•		•		-94° to 275°F	35
B-438	Checkerboard Pattern Tamper Evident Matte Metallized Polyester	Tamper-indicating, metallized polyester label that leaves an aggressive checkerboard adhesive pattern on the surface if label is removed. It has a matte, silver appearance with has excellent imaging quality for text, barcodes and symbols. It is designed for rating and serial plates, asset tracking labels and product ID such as warranty labels when anti-tampering and tamper-indicating features are desired.	●	•		•		-40° to 104°F	36
B-443	Ultra Aggressive Adhesive High Temp and Chemical Resistant Polyester Labels	Very durable matte polyester with excellent high-temp resistance and superior resistance to fluids and chemicals that are not high in pH value. Short term temp resistance to 410° F. Features a hybrid acrylic-rubber-based permanent adhesive and is self-extinguishing.	○	•		•		-94° to 248° F	38
B-480	Ultra High Adhesion Matte Faux Metallized Polyester Labels	Thermal transfer polyester material with a metallic-looking finish and an aggressive adhesive.	●	•				-94° to 248° F	35
B-483A	Ultra High Adhesion Multi-Purpose Polyester	Polyester with high-gloss finish and ultra-aggressive, permanent acrylic adhesive. Designed for very high adhesion to flat but highly textured or powder-coated surfaces and low-surface-energy surfaces. Gloss version of B-489.	○	•			•	-40° to 248°F	30, 35
B-484	Flexible High Adhesion Multi-Purpose Polyester	Polyester with a glossy finish and a stronger, permanent acrylic adhesive. Similar to B-483, but with a thinner construction to facilitate high adhesion to flat, curved or angular surfaces, and surfaces that are textured, powder coated or low-surface energy.	○	•			•	-40° to 248°F	35
B-486	Ultra High Adhesion Metallized Matte Polyester	Matte metallized polyester with an ultra-aggressive, permanent adhesive. It has a light gray, matte appearance. Designed for very high adhesion to flat but highly textured or powder-coated surfaces and low-surface-energy surfaces. Ideal for panel rating plates, product labels and asset-tracking labels.	●	•		•		-40° to 248°F	35
B-488	Solvent Resistant Polyester Labels	High Performance Polyester withstands numerous solvents and variable temperatures when applied to various surfaces including Stainless Steel and Polypropylene.	○	•		•		-40° to -320°F	35
B-489	Ultra High Adhesion Multi-Purpose Matte Polyester	Matte polyester with an ultra-aggressive, permanent adhesive. It is designed for very high adhesion to flat but highly textured or powder-coated surfaces and low-surface-energy surfaces. Matte version of B-483.	○	•		•		-94° to 248°F	35
B-498	Repositionable Multi-Purpose Vinyl Cloth	Vinyl cloth with an aggressive and repositionable adhesive for wire and cable wraps and general-purpose labeling applications. Label adheres with excellent holding power, yet can be easily and cleanly removed and repositioned.	○		•		•	-40° to 175°F	35
B-509	Magnetic Polyester (repositionable)	A thick, non-adhesive magnetic material with a printable vinyl topcoat. The easiest and quickest material for repositioning and reusing labels.	○●		•	•		-0° to 158°F	29

			Color	Permanent	Removable	Matte	Gloss	Service Temperature	Page #
B-526	BradyGlo™ High Intensity Glow-in-the-Dark Polyester	Printable BradyGlo™ photoluminescent polyester tape is for glow-in-the-dark identification for up to 10 hours. Ideal for marking emergency shut-offs and controls markings, supplemental evacuation labels and marking emergency equipment.		•			•	-40° to 140°F	31
B-549	Cold Temperature Application Multi-Purpose Polyester	Cold-temperature polyester material permanently adheres to frozen surfaces. Can be applied in temperatures as low as -10°F, and stays adhered in -40°F temperatures.		•		•		-40° to 212°F	33
B-551	Heavy Duty Non-adhesive Tag Stock	A durable, non-adhesive plastic tag material. Ideal for safety and general-purpose industrial hang-tags, as well as lockout tagout applications. Meets OSHA 50 lb. pull test.		n/a	n/a	•		-40° to 193°F	26
B-565	Metallized Polyester Labels	Metallized polyester film with a permanent acrylic pressure sensitive adhesive and a topcoat specifically formulated for thermal transfer printing.		•			•	-40° to 230°F	35, 36
B-569	Low-Halide Multi-Purpose Polyester	Low-halide polyester label material with a permanent adhesive. It is designed for stainless steel pipes and stainless steel surfaces, and is best suited for smooth, clean, flat surfaces.		•			•	-40° to 212°F	22, 24
B-581	Repositionable Multi-Purpose Vinyl	Durable vinyl label with repositionable adhesive.			•	•		-40° to 180°F	29
B-584	All-Weather Reflective	Printable retroreflective tape. This is highly reflective material that shines back brightly when struck by light. Ideal for low-light and inclement-weather viewing applications.		•			•	-40° to 158°F	31
B-593	Raised Profile Foam-backed Polyester	High-gloss polyester label with a thick, raised profile and an ultra-aggressive permanent adhesive. Designed as a high-performance low-cost alternative to engraved plates and push-button labels on panels and enclosures. Ideal for labeling small components inside panels.		•			•	-4° to 212°F	33, 34
B-595	All Weather Vinyl	Indoor- and outdoor-grade vinyl with a permanent adhesive in a wide range of colors. Durable, pliable and highly conforming to rough and irregular surfaces.		•			•	-40° to 180°F	21, 23, 25, 27, 28, 35
B-724	Ultra High Temp Matte Amber Polyimide	Extreme, high-temperature polyimide film with a permanent acrylic adhesive. It is designed to withstand the various processes, fluxes and cleaning solvents encountered in the manufacture of printed circuit boards. Can be used for top- or bottom-side component or board identification. Withstands extremely high temperatures.		•		•		-94° to 626°F check TDS for temp duration details	35
B-727	High Temp Polyimide	Glossy polyimide film with a permanent acrylic adhesive. It is designed to withstand the various processes, fluxes and cleaning solvents encountered in the manufacture of printed circuit boards. Can be used for top- or bottom-side component or board identification. Glossy topcoat provides excellent contrast and smear resistance.		•			•	-94° to 572°F check TDS for temp duration detail	35
B-787	Polyvinylfluoride Tape	Polyvinylfluoride tape is ideal for label applications where self-extinguishing properties are required.		•			•	-94° to -212°F	35
B-7569	General Purpose Vinyl	Durable vinyl label with permanent adhesive.		•			•	-4° to 167°F	24, 28
B-851	Heavy Duty Non-adhesive Tag Stock	A durable, non-adhesive plastic tag material. Ideal for safety and general-purpose industrial hang-tags, as well as lockout tagout applications. Meets OSHA 50 lb. pull test.		n/a	n/a	•		-40° to 193°F	26
B-854	ToughWash® Metal Detectable Washdown Resistant Polyester	Metal-detectable ToughWash® washdown-resistant label with a permanent adhesive. This material features a metal-detectable layer to allow detection in the food stream. Withstands numerous cycles of harsh chemicals, heat and heavy moisture.		•		•		-40° to 230°F	32
B-855	ToughWash® Washdown Resistant Polyester	ToughWash® washdown-resistant label with a permanent adhesive. Withstands numerous cycles of harsh chemicals, heat and heavy moisture. Abrasion, fuel, oil, chemical, high- and low-temperature resistant.		•		•		-40° to 230°F	32

All-Weather Vinyl (B-595)

- For general facility and safety identification
- Durable, low-shrink vinyl with our most aggressive adhesive
- Conforms to irregular, curved, rough and highly textured surfaces (painted cinder blocks, uneven wood, textured plastics, paper-jacketed pipes, powder-coated surfaces)
- Adheres to difficult low-surface energy items (PVC piping, blow-molded equipment cases, ABS plastics, recycled plastics)





Figure 3



For XY-Cutter	Diagram	Catalog #	Color	Label Width A Inch (mm)	Roll Length B Feet (m)	Labels Per Roll	Rec. Ribbon
-	Fig. 3	B30C-500-595-WT	White	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000
-	Fig. 3	B30C-1125-595-WT	White	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000
-	Fig. 3	B30C-2250-595-WT	White	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000
-	Fig. 3	B30C-3000-595-WT	White	3.000 (76.2)	100 (30.5)	1 roll (cont.)	B30-R10000
✂	Fig. 3	B30C-4000-595-WT	White	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000
-	Fig. 3	B30C-500-595-YL	Yellow	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000
-	Fig. 3	B30C-1125-595-YL	Yellow	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000
-	Fig. 3	B30C-2250-595-YL	Yellow	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000
-	Fig. 3	B30C-3000-595-YL	Yellow	3.000 (76.2)	100 (30.5)	1 roll (cont.)	B30-R10000
✂	Fig. 3	B30C-4000-595-YL	Yellow	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000
-	Fig. 3	B30C-500-595-RD	Red	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
-	Fig. 3	B30C-1125-595-RD	Red	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
-	Fig. 3	B30C-2250-595-RD	Red	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
✂	Fig. 3	B30C-4000-595-RD	Red	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
-	Fig. 3	B30C-500-595-BL	Blue	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
-	Fig. 3	B30C-1125-595-BL	Blue	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
-	Fig. 3	B30C-2250-595-BL	Blue	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
✂	Fig. 3	B30C-4000-595-BL	Blue	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
-	Fig. 3	B30C-500-595-GN	Green	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
-	Fig. 3	B30C-1125-595-GN	Green	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
-	Fig. 3	B30C-2250-595-GN	Green	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
✂	Fig. 3	B30C-4000-595-GN	Green	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
-	Fig. 3	B30C-500-595-OR	Orange	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000
-	Fig. 3	B30C-1125-595-OR	Orange	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000
-	Fig. 3	B30C-2250-595-OR	Orange	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000
✂	Fig. 3	B30C-4000-595-OR	Orange	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000
-	Fig. 3	B30C-500-595-BK	Black	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
-	Fig. 3	B30C-1125-595-BK	Black	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
-	Fig. 3	B30C-2250-595-BK	Black	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
✂	Fig. 3	B30C-4000-595-BK	Black	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
-	Fig. 3	B30C-500-595-BR	Brown	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
-	Fig. 3	B30C-1125-595-BR	Brown	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
-	Fig. 3	B30C-2250-595-BR	Brown	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
✂	Fig. 3	B30C-4000-595-BR	Brown	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
-	Fig. 3	B30C-500-595-GD	Gold	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000
-	Fig. 3	B30C-1125-595-GD	Gold	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000
-	Fig. 3	B30C-2250-595-GD	Gold	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000
✂	Fig. 3	B30C-4000-595-GD	Gold	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000
-	Fig. 3	B30C-500-595-GY	Gray	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000
-	Fig. 3	B30C-1125-595-GY	Gray	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000
-	Fig. 3	B30C-2250-595-GY	Gray	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000
✂	Fig. 3	B30C-4000-595-GY	Gray	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000
-	Fig. 3	B30C-500-595-PL	Purple	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
-	Fig. 3	B30C-1125-595-PL	Purple	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
-	Fig. 3	B30C-2250-595-PL	Purple	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
✂	Fig. 3	B30C-4000-595-PL	Purple	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
-	Fig. 3	B30C-500-595-CL	Clear	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000
-	Fig. 3	B30C-1125-595-CL	Clear	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000
-	Fig. 3	B30C-2250-595-CL	Clear	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000
✂	Fig. 3	B30C-4000-595-CL	Clear	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000

U.S. Patent Nos. 5,823,689; 6,570,602. Additional Patents Pending.

Low-Halide Multi-Purpose Polyester (B-569)

- Low-halide content for labeling stainless steel pipes and surfaces.
- Adheres best to very smooth surfaces and ideal for mounting to rigid panels




Figure 3



For XY-Cutter	Diagram	Catalog #	Color	Label Width A Inch (mm)	Roll Length B Feet (m)	Labels Per Roll	Rec. Ribbon
-	Fig. 3	B30C-500-569-WT	White	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000
-	Fig. 3	B30C-1125-569-WT	White	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000
-	Fig. 3	B30C-2250-569-WT	White	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000
-	Fig. 3	B30C-3000-569-WT	White	3.000 (76.2)	100 (30.5)	1 roll (cont.)	B30-R10000
✂	Fig. 3	B30C-4000-569-WT	White	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000
-	Fig. 3	B30C-500-569-YL	Yellow	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000
-	Fig. 3	B30C-1125-569-YL	Yellow	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000
-	Fig. 3	B30C-2250-569-YL	Yellow	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000
✂	Fig. 3	B30C-4000-569-YL	Yellow	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000
-	Fig. 3	B30C-500-569-RD	Red	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
-	Fig. 3	B30C-1125-569-RD	Red	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
-	Fig. 3	B30C-2250-569-RD	Red	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
✂	Fig. 3	B30C-4000-569-RD	Red	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
-	Fig. 3	B30C-500-569-BL	Blue	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
-	Fig. 3	B30C-1125-569-BL	Blue	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
-	Fig. 3	B30C-2250-569-BL	Blue	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
✂	Fig. 3	B30C-4000-569-BL	Blue	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
-	Fig. 3	B30C-500-569-LB	Light Blue	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000
-	Fig. 3	B30C-1125-569-LB	Light Blue	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000
-	Fig. 3	B30C-2250-569-LB	Light Blue	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000
✂	Fig. 3	B30C-4000-569-LB	Light Blue	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000
-	Fig. 3	B30C-500-569-SB	Sky Blue	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000
-	Fig. 3	B30C-1125-569-SB	Sky Blue	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000
-	Fig. 3	B30C-2250-569-SB	Sky Blue	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000
✂	Fig. 3	B30C-4000-569-SB	Sky Blue	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000
-	Fig. 3	B30C-500-569-GN	Green	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
-	Fig. 3	B30C-1125-569-GN	Green	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
-	Fig. 3	B30C-2250-569-GN	Green	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
✂	Fig. 3	B30C-4000-569-GN	Green	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
-	Fig. 3	B30C-500-569-OR	Orange	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000
-	Fig. 3	B30C-1125-569-OR	Orange	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000
-	Fig. 3	B30C-2250-569-OR	Orange	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000
✂	Fig. 3	B30C-4000-569-OR	Orange	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000
-	Fig. 3	B30C-500-569-BK	Black	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
-	Fig. 3	B30C-1125-569-BK	Black	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
-	Fig. 3	B30C-2250-569-BK	Black	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
✂	Fig. 3	B30C-4000-569-BK	Black	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
-	Fig. 3	B30C-500-569-BR	Brown	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
-	Fig. 3	B30C-1125-569-BR	Brown	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
-	Fig. 3	B30C-2250-569-BR	Brown	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
✂	Fig. 3	B30C-4000-569-BR	Brown	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
-	Fig. 3	B30C-500-569-OC	Ochre	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000
-	Fig. 3	B30C-1125-569-OC	Ochre	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000
-	Fig. 3	B30C-2250-569-OC	Ochre	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000
✂	Fig. 3	B30C-4000-569-OC	Ochre	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000
-	Fig. 3	B30C-500-569-TN	Tan	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000
-	Fig. 3	B30C-1125-569-TN	Tan	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000
-	Fig. 3	B30C-2250-569-TN	Tan	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000
✂	Fig. 3	B30C-4000-569-TN	Tan	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000
-	Fig. 3	B30C-500-569-GY	Gray	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000
-	Fig. 3	B30C-1125-569-GY	Gray	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000
-	Fig. 3	B30C-2250-569-GY	Gray	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000
✂	Fig. 3	B30C-4000-569-GY	Gray	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000
-	Fig. 3	B30C-500-569-PL	Purple	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
-	Fig. 3	B30C-1125-569-PL	Purple	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
-	Fig. 3	B30C-2250-569-PL	Purple	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
✂	Fig. 3	B30C-4000-569-PL	Purple	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000-WT
-	Fig. 3	B30C-500-569-PK	Pink	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000
-	Fig. 3	B30C-1125-569-PK	Pink	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000
-	Fig. 3	B30C-2250-569-PK	Pink	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000
✂	Fig. 3	B30C-4000-569-PK	Pink	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000
-	Fig. 3	B30C-500-569-CL	Clear	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000
-	Fig. 3	B30C-1125-569-CL	Clear	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000
-	Fig. 3	B30C-2250-569-CL	Clear	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000
✂	Fig. 3	B30C-4000-569-CL	Clear	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000

Pre-Printed Pre-Cut Blank Sign Headers

(B-595)

- Allows printer to create multicolor signs fast in a single print pass
- Headers meet NFPA 70E, OSHA 1910.145 and ASME / ANSI Z535 standards
- Indoor / outdoor grade material conforms to rough, highly textured and difficult-to-adhere-to surfaces




Figure 70a



Diagram	Catalog #	B#	Material	Header	Label Height A Inch (mm)	Label Width B Inch (mm)	Labels Per Row	Labels Per Roll	Rec. Ribbon
Fig. 70a	B30-241-595-OSHADA	B-595	Vinyl		2.250 (57.5)	3.000 (76.2)	1	300	B30-R10000
Fig. 70a	B30-25-595-OSHADA	B-595	Vinyl		4.000 (101.6)	6.000 (152.4)	1	175	B30-R10000
Fig. 70a	B30-241-595-OSHACA	B-595	Vinyl		2.250 (57.5)	3.000 (76.2)	1	300	B30-R10000
Fig. 70a	B30-25-595-OSHACA	B-595	Vinyl		4.000 (101.6)	6.000 (152.4)	1	175	B30-R10000
Fig. 70a	B30-241-595-ANSICA	B-595	Vinyl		2.250 (57.5)	3.000 (76.2)	1	300	B30-R10000
Fig. 70a	B30-25-595-ANSICA	B-595	Vinyl		4.000 (101.6)	6.000 (152.4)	1	175	B30-R10000
Fig. 70a	B30-241-595-ANSIDA	B-595	Vinyl		2.250 (57.5)	3.000 (76.2)	1	300	B30-R10000
Fig. 70a	B30-25-595-ANSIDA	B-595	Vinyl		4.000 (101.6)	6.000 (152.4)	1	175	B30-R10000
Fig. 70a	B30-241-595-ANSIWA	B-595	Vinyl		2.250 (57.5)	3.000 (76.2)	1	300	B30-R10000
Fig. 70a	B30-25-595-ANSIWA	B-595	Vinyl		4.000 (101.6)	6.000 (152.4)	1	175	B30-R10000
Fig. 70a	B30-241-595-ANSINO	B-595	Vinyl		2.250 (57.5)	3.000 (76.2)	1	300	B30-R10000
Fig. 70a	B30-25-595-ANSINO	B-595	Vinyl		4.000 (101.6)	6.000 (152.4)	1	175	B30-R10000
Fig. 70a	B30-25-595-PREC	B-595	Vinyl		4.000 (101.6)	6.000 (152.4)	1	175	B30-R10000
Fig. 70a	B30-25-595-PEL	B-595	Vinyl		4.000 (101.6)	6.000 (152.4)	1	175	B30-R10000
Fig. 70a	B30-242-595-BLNKWT	B-595	Vinyl		1.125 (28.6)	2.750 (69.9)	1	300	B30-R10000
Fig. 70a	B30-241-595-BLNKWT	B-595	Vinyl		2.250 (57.5)	3.000 (76.2)	1	300	B30-R10000
Fig. 70a	B30-219-595-BLNKWT	B-595	Vinyl		2.250 (57.5)	3.750 (95.3)	1	250	B30-R10000
Fig. 70a	B30-25-595-BLNKWT	B-595	Vinyl		4.000 (101.6)	6.000 (152.4)	1	175	B30-R10000
Fig. 70a	B30-241-595-BLNKYL	B-595	Vinyl		2.250 (57.5)	3.000 (76.2)	1	300	B30-R10000
Fig. 70a	B30-25-595-BLNKYL	B-595	Vinyl		4.000 (101.6)	6.000 (152.4)	1	175	B30-R10000

Pre-Printed GHS / CLP Chemical Labels (B-569, B-7569)

- Blank labels with pre-printed red diamonds allow the printer to produce 2-color GHS / CLP labels in one print pass
- Three sizes of labels, each with six diamond layouts that match templates in the printer app (if applicable) or in the Brady Workstation GHS App
- Indoor / outdoor vinyl material and durable inks withstand exposure to moisture, chemicals and handling



Catalog #	B#	Material	Legend		Label Height Inch (mm)	Label Width Inch (mm)	Labels Per Row	Labels Per Roll	Rec. Ribbon
B30-260-7569-CLP1	B-7569	Vinyl		L1 Diamond + Text	2.170 (55.0)	3.350 (85.1)	1	340	B30-R10000
B30-261-7569-CLP1	B-7569	Vinyl		L1 Diamond + Text	2.950 (75.0)	4.330 (110.0)	1	270	B30-R10000
B30-262-7569-CLP1	B-7569	Vinyl		L1 Diamond + Text	4.130 (105.0)	6.100 (155.0)	1	200	B30-R10000
B30-260-7569-CLP2	B-7569	Vinyl		L2 Diamond + Text	2.170 (55.0)	3.350 (85.1)	1	340	B30-R10000
B30-261-7569-CLP2	B-7569	Vinyl		L2 Diamond + Text	2.950 (75.0)	4.330 (110.0)	1	270	B30-R10000
B30-262-7569-CLP2	B-7569	Vinyl		L2 Diamond + Text	4.130 (105.0)	6.100 (155.0)	1	200	B30-R10000
B30-260-7569-CLP3A	B-7569	Vinyl		L3A Diamond + Text	2.170 (55.0)	3.350 (85.1)	1	340	B30-R10000
B30-261-7569-CLP3A	B-7569	Vinyl		L3A Diamond + Text	2.950 (75.0)	4.330 (110.0)	1	270	B30-R10000
B30-262-7569-CLP3A	B-7569	Vinyl		L3A Diamond + Text	4.130 (105.0)	6.100 (155.0)	1	200	B30-R10000
B30-260-7569-CLP3B	B-7569	Vinyl		L3B Diamond + Text	2.170 (55.0)	3.350 (85.1)	1	340	B30-R10000
B30-261-7569-CLP3B	B-7569	Vinyl		L3B Diamond + Text	2.950 (75.0)	4.330 (110.0)	1	270	B30-R10000
B30-262-7569-CLP3B	B-7569	Vinyl		L3B Diamond + Text	4.130 (105.0)	6.100 (155.0)	1	200	B30-R10000
B30-260-7569-CLP4A	B-7569	Vinyl		L4A Diamond + Text	2.170 (55.0)	3.350 (85.1)	1	340	B30-R10000
B30-261-7569-CLP4A	B-7569	Vinyl		L4A Diamond + Text	2.950 (75.0)	4.330 (110.0)	1	270	B30-R10000
B30-262-7569-CLP4A	B-7569	Vinyl		L4A Diamond + Text	4.130 (105.0)	6.100 (155.0)	1	200	B30-R10000
B30-260-569-CLP4B	B-569	Polyester		L4B Diamond + Text	2.170 (55.0)	3.350 (85.1)	1	340	B30-R10000
B30-260-7569-CLP4B	B-7569	Vinyl		L4B Diamond + Text	2.170 (55.0)	3.350 (85.1)	1	340	B30-R10000
B30-261-569-CLP4B	B-569	Polyester		L4B Diamond + Text	2.950 (75.0)	4.330 (110.0)	1	270	B30-R10000
B30-261-7569-CLP4B	B-7569	Vinyl		L4B Diamond + Text	2.950 (75.0)	4.330 (110.0)	1	270	B30-R10000
B30-262-569-CLP4B	B-569	Polyester		L4B Diamond + Text	4.130 (105.0)	6.100 (155.0)	1	200	B30-R10000
B30-262-7569-CLP4B	B-7569	Vinyl		L4B Diamond + Text	4.130 (105.0)	6.100 (155.0)	1	200	B30-R10000
B30-18-7569-CLP4C	B-7569	Vinyl		L4C Diamond + Text	1.000 (25.4)	3.000 (76.2)	1	1000	B30-R10000

► Easily create your GHS labels with Brady Workstation GHS App

- Use built-in pre-formatted label layouts with approved GHS symbols
- Search the built-in chemical database by CAS number to auto-populate your label, then edit to meet your specific SDS
- Print any of the six template sizes
- No driver required when using the BradyPrinter S3700



Pre-Printed Right-To-Know Chemical Labels

(B-595)

- Produce 5-color chemical labels in a single print pass
- Indoor / outdoor grade material withstands exposure to moisture, chemicals and handling

Service temp: -40 to 180° F

Application temp: 0 to 180° F

Average outdoor durability: 8–10 years

Agency approvals: **RoHS**



Catalog #	Legend		Label Height Inch (mm)	Label Width Inch (mm)	Labels Per Roll	Rec. Ribbon
B30-244-595-NFPA		Diamond + Text	2.250 (57.5)	2.250 (57.5)	365	B30-R10000
B30-245-595-NFPA		Diamond + Text	2.250 (57.5)	4.000 (101.6)	240	B30-R10000
B30-263-595-NFPA		Diamond + Text	4.000 (101.6)	6.250 (158.8)	170	B30-R10000
B30-244-595-DIAM		Diamond Only	2.250 (57.5)	2.250 (57.5)	365	B30-R10000
B30-161-595-DIAM		Diamond Only	4.000 (101.6)	4.000 (101.6)	240	B30-R10000
B30-246-595-NFR		Diamond NFR	1.125 (28.6)	3.000 (76.2)	300	B30-R10000
B30-244-595-CB		Color Bar + Text	2.250 (57.5)	2.250 (57.5)	365	B30-R10000
B30-245-595-CB		Color Bar + Text	2.250 (57.5)	4.000 (101.6)	240	B30-R10000
B30-263-595-CB		Color Bar + Text	4.000 (101.6)	6.250 (158.8)	170	B30-R10000
B30-244-595-HMIG		Color Bar Only	2.250 (57.5)	2.250 (57.5)	365	B30-R10000
B30-246-595-HMIG		Color Bar HMIG	1.125 (28.6)	3.000 (76.2)	300	B30-R10000

Heavy Duty Polyester Tags

(B-551, B-851)

- Non-adhesive polyester tag provides superior durability and outdoor performance over paper tags
- All tags are user-printable on front side only – pre-printed reverse side text options available
- Tags comply with OSHA 1910.145(f) when printed with required signal word and major message, and exceed 50 lb. pull test for lockout application
- Blank tags are ideal for general industrial and color coding applications
- Tags are pre-cut with large diameter mounting hole and are micro-perforated between tags to separate cleanly
- Snap-in plastic grommets available to add extra strength around mounting hole (catalog #20596, 100 per bag)




Figure 3b




Figure 69a
Printable Front Side




Figure 69b
Printable Front Side







Figure 69c
Printable Front Side



Pre-Printed
Reverse Side B



Pre-Printed
Reverse Side F



Blank
Reverse Side

Diagram	Catalog #	Color	B#	Printable Front Side	Non-Printable Reverse Side Text	Tag Width A	Tag Length B	Tags Per Roll	Rec. Ribbon
69c	B30-255-851OSHADS	White w/Hdr	B-851			3.250 (82.6)	5.750 (146.1)	100	B30-R10000
69a	B30-255-851-ANSIDB	White w/Hdr	B-851			3.250 (82.6)	5.750 (146.1)	100	B30-R10000
69a	B30-255-851-OSHADB	White w/Hdr	B-851			3.250 (82.6)	5.750 (146.1)	100	B30-R10000
69b	B30-255-851-WHT-B	White	B-851			3.250 (82.6)	5.750 (146.1)	100	B30-R10000
69c	B30-255-851OSHADSF	White w/Hdr	B-851			3.250 (82.6)	5.750 (146.1)	100	B30-R10000
69a	B30-255-851-ANSIDF	White w/Hdr	B-851			3.250 (82.6)	5.750 (146.1)	100	B30-R10000
69a	B30-255-851-OSHADF	White w/Hdr	B-851			3.250 (82.6)	5.750 (146.1)	100	B30-R10000
69b	B30-255-851-WHT-F	White	B-851			3.250 (82.6)	5.750 (146.1)	100	B30-R10000
69c	B30-255-851-OST-BK	White w/Hdr	B-851			3.250 (82.6)	5.750 (146.1)	100	B30-R10000
69a	B30-255-851-ANSIDA	White w/Hdr	B-851			3.250 (82.6)	5.750 (146.1)	100	B30-R10000
69a	B30-255-851-OSHADA	White w/Hdr	B-851			3.250 (82.6)	5.750 (146.1)	100	B30-R10000
69a	B30-255-851-ANSICA	White w/Hdr	B-851			3.250 (82.6)	5.750 (146.1)	100	B30-R10000
69b	B30-255-851-WT	White	B-851			3.250 (82.6)	5.750 (146.1)	100	B30-R10000
69b	B30-255-851-RD	Red	B-851			3.250 (82.6)	5.750 (146.1)	100	B30-R10000
69b	B30-255-851-YL	Yellow	B-851			3.250 (82.6)	5.750 (146.1)	100	B30-R10000
69b	B30-255-851-GN	Green	B-851			3.250 (82.6)	5.750 (146.1)	100	B30-R10000
69b	B30-255-851-BL	Blue	B-851			3.250 (82.6)	5.750 (146.1)	100	B30-R10000
69b	B30-255-851-OR	Orange	B-851			3.250 (82.6)	5.750 (146.1)	100	B30-R10000
3b	B30C-2500-551-WT	White	B-551			2.500 (63.5)	50 ft. (15.2m)	1 roll (cont.)	B30-R10000
3b	B30C-3250-551-WT	White	B-551			3.250 (82.6)	50 ft. (15.2m)	1 roll (cont.)	B30-R10000
3b	B30C-4250-551-WT	White	B-551			4.250 (107.9)	50 ft. (15.2m)	1 roll (cont.)	B30-R10000

General Identification Die Cut Labels for Bins, Shelves, Tools and Production Areas (B-595)

- These labels are all highly conforming to irregular, angled or rough surfaces frequently found in industrial production line areas
- Die-cut labels are an ideal choice when pre-cut labels are preferred or consistent label sizing is required
- B-595 is a convenient cut-to-length continuous material that reduces the need to stock multiple parts when inconsistent label lengths are expected




Figure 3a



Diagram	Catalog #	Color	Label Width A Inch (mm)	Label Height B Inch (mm)	Web Width E Inch (mm)	Labels Per Row	Rec. Ribbon
Fig. 3a	B30C-500-595-WT	White	0.500 (12.7)	100 ft. (30.5 m)	0.700 (17.8)	1 roll (cont.)	B30-R10000
Fig. 3a	B30C-1125-595-WT	White	1.125 (28.6)	100 ft. (30.5 m)	1.375 (34.9)	1 roll (cont.)	B30-R10000
Fig. 3a	B30C-500-595-YL	Yellow	0.500 (12.7)	100 ft. (30.5 m)	0.700 (17.8)	1 roll (cont.)	B30-R10000
Fig. 3a	B30C-1125-595-YL	Yellow	1.125 (28.6)	100 ft. (30.5 m)	1.375 (34.9)	1 roll (cont.)	B30-R10000

General Identification for Laboratory Storage, Equipment and Safety Labels

(B-595, B-7569)

- Super strong adhesives and colors ideal for marking laboratory equipment, containers, hoses and lab storage cabinets, shelves and drawers
- GHS labels available for marking chemicals in the lab and shipment boxes when collaborating with other labs
- Pre-printed sign header labels make your safety and housekeeping reminders stand out and stay put!





Diagram	Catalog #	Color /Legend	Label Width A Inch (mm)	Label Height B Inch (mm)	Roll Length B Feet (m)	Labels Per Row	Labels Per Roll	Rec. Ribbon
Indoor/Outdoor Vinyl (B-595):								
Fig. 3a	B30C-500-595-WT	White	0.500 (12.7)	—	100 (30.5)	—	1 roll (cont.)	B30-R10000
Fig. 3a	B30C-1125-595-WT	White	1.125 (28.6)	—	100 (30.5)	—	1 roll (cont.)	B30-R10000
Fig. 3a	B30C-500-595-YL	Yellow	0.500 (12.7)	—	100 (30.5)	—	1 roll (cont.)	B30-R10000
Fig. 3a	B30C-1125-595-YL	Yellow	1.125 (28.6)	—	100 (30.5)	—	1 roll (cont.)	B30-R10000
Fig. 3a	B30C-500-595-RD	Red	0.500 (12.7)	—	100 (30.5)	—	1 roll (cont.)	B30-R10000-WT
Fig. 3a	B30C-1125-595-RD	Red	1.125 (28.6)	—	100 (30.5)	—	1 roll (cont.)	B30-R10000-WT
Fig. 3a	B30C-500-595-BL	Blue	0.500 (12.7)	—	100 (30.5)	—	1 roll (cont.)	B30-R10000-WT
Fig. 3a	B30C-1125-595-BL	Blue	1.125 (28.6)	—	100 (30.5)	—	1 roll (cont.)	B30-R10000-WT
Fig. 3a	B30C-500-595-GN	Green	0.500 (12.7)	—	100 (30.5)	—	1 roll (cont.)	B30-R10000-WT
Fig. 3a	B30C-1125-595-GN	Green	1.125 (28.6)	—	100 (30.5)	—	1 roll (cont.)	B30-R10000-WT
Pre-Printed Pre-Cut Blank Sign Headers (B-595):								
Fig. 70	B30-241-595-ANSIDA		2.250 (57.5)	3.000 (76.2)	—	1	300	B30-R10000
Fig. 70	B30-25-595-ANSIDA		4.000 (101.6)	6.000 (152.4)	—	1	175	B30-R10000
Fig. 70	B30-241-595-ANSINO		2.250 (57.5)	3.000 (76.2)	—	1	300	B30-R10000
Fig. 70	B30-25-595-ANSINO		4.000 (101.6)	6.000 (152.4)	—	1	175	B30-R10000
Pre-Printed GHS/CLP Chemical (B-7569):								
L4B Diamond + Text	B30-260-7569-CLP4B		2.170 (55.0)	3.350 (85.1)	—	1	340	B30-R10000
	B30-261-7569-CLP4B		2.950 (75.0)	4.330 (110.0)	—	1	270	B30-R10000
L4C Diamond + Text	B30-18-7569-CLP4C		1.000 (25.4)	3.000 (76.2)	—	1	1000	B30-R10000

(B-595) U.S. Patent Nos. 5,823,689; 6,570,602. Additional Patents Pending.

Repositionable Multi-Purpose Vinyl (B-581)

- Aggressive adhesive stays in place but removes cleanly without leaving adhesive residue
- Ideal for temporary, removable and repositionable facility labels, such as Lean / 5S inventory labels




Figure 3



For XY-Cutter	Diagram	Catalog #	Color	Label Width A Inch (mm)	Roll Length B Feet (m)	Labels Per Roll	Rec. Ribbon
-	Fig. 3	B30C-500-581-WT	White	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000
-	Fig. 3	B30C-1125-581-WT	White	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000
-	Fig. 3	B30C-2250-581-WT	White	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000
✂	Fig. 3	B30C-4000-581-WT	White	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000
-	Fig. 3	B30C-500-581-YL	Yellow	0.500 (12.7)	100 (30.5)	1 roll (cont.)	B30-R10000
-	Fig. 3	B30C-1125-581-YL	Yellow	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000
-	Fig. 3	B30C-2250-581-YL	Yellow	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000
✂	Fig. 3	B30C-4000-581-YL	Yellow	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000

Printable Magnetic Labels (B-509)

- Easiest and quickest material for removing and repositioning
- Non-adhesive magnetic material that can be printed on directly
- Ideal for changing shelf storage locations, and reusable/repositionable Lean / 5S applications




Figure 3b



Diagram	Catalog #	Color	Label Width A Inch (mm)	Roll Length B Feet (m)	Labels Per Roll	Rec. Ribbon
Fig. 3b	B30C-2500-509-WT	White	2.500 (63.5)	25 (7.62)	1 roll (cont.)	B30-R10000
Fig. 3b	B30C-4250-509-WT	White	4.250 (107.8)	25 (7.62)	1 roll (cont.)	B30-R10000
Fig. 3b	B30C-2500-509-YL	Yellow	2.500 (63.5)	25 (7.62)	1 roll (cont.)	B30-R10000
Fig. 3b	B30C-4250-509-YL	Yellow	4.250 (107.8)	25 (7.62)	1 roll (cont.)	B30-R10000

ToughStripe® Printable Floor Marking Tape (B-483A with overlamine)

- Revolutionary B-483A material has ultra-aggressive adhesive
- Withstands forklift and pallet jack traffic without tearing or lifting
- Each roll ships with a roll of clear overlamine which must be applied over printed label and onto appropriate surface for best performance




Figure 3b



For XY-Cutter	Diagram	Catalog #	B#	Color	Label Width A Inch (mm)	Roll Length B Feet (m)	Labels Per Roll	Rec. Ribbon
-	Fig. 3b	B30C-1125-483WT-KT	B-483	White	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R6000
-	Fig. 3b	B30C-2250-483WT-KT	B-483	White	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R6000
-	Fig. 3b	B30C-3000-483WT-KT	B-483	White	3.000 (76.2)	100 (30.5)	1 roll (cont.)	B30-R6000
✂	Fig. 3b	B30C-4000-483WT-KT	B-483	White	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R6000
-	Fig. 3b	B30C-1125-483YL-KT	B-483	Yellow	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R6000
-	Fig. 3b	B30C-2250-483YL-KT	B-483	Yellow	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R6000
-	Fig. 3b	B30C-3000-483YL-KT	B-483	Yellow	3.000 (76.2)	100 (30.5)	1 roll (cont.)	B30-R6000
✂	Fig. 3b	B30C-4000-483YL-KT	B-483	Yellow	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R6000
-	Fig. 3b	B30C-1125-483RD-KT	B-483	Red	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R4400-WT
-	Fig. 3b	B30C-2250-483RD-KT	B-483	Red	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R4400-WT
✂	Fig. 3b	B30C-4000-483RD-KT	B-483	Red	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R4400-WT
-	Fig. 3b	B30C-1125-483BL-KT	B-483	Blue	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R4400-WT
-	Fig. 3b	B30C-2250-483BL-KT	B-483	Blue	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R4400-WT
✂	Fig. 3b	B30C-4000-483BL-KT	B-483	Blue	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R4400-WT
-	Fig. 3b	B30C-1125-483GN-KT	B-483	Green	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R4400-WT
-	Fig. 3b	B30C-2250-483GN-KT	B-483	Green	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R4400-WT
✂	Fig. 3b	B30C-4000-483GN-KT	B-483	Green	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R4400-WT
-	Fig. 3b	B30C-1125-483BK-KT	B-483	Black	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R4400-WT
-	Fig. 3b	B30C-2250-483BK-KT	B-483	Black	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R4400-WT
✂	Fig. 3b	B30C-4000-483BK-KT	B-483	Black	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R4400-WT
-	Fig. 3b	B30C-1125-483OR-KT	B-483	Orange	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R6000
-	Fig. 3b	B30C-2250-483OR-KT	B-483	Orange	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R6000
✂	Fig. 3b	B30C-4000-483OR-KT	B-483	Orange	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R6000

Retro Reflective All-Weather Labels

(B-584)

- Highly reflective material shines back brightly when struck by light
- Ideal for labeling outdoor utility pedestals, hard hats, jobsite equipment and roof-top equipment
- Recommended for low light or inclement weather conditions




Figure 3



For XY-Cutter	Diagram	Catalog #	Color	Label Width A Inch (mm)	Roll Length B Feet (m)	Labels Per Roll	Rec. Ribbon
-	Fig. 3	B30C-1125-584-SL	Silver	1.125 (28.6)	50 (15.2)	1 roll (cont.)	B30-R10000
-	Fig. 3	B30C-2250-584-SL	Silver	2.250 (57.5)	50 (15.2)	1 roll (cont.)	B30-R10000
✂	Fig. 3	B30C-4000-584-SL	Silver	4.000 (101.6)	50 (15.2)	1 roll (cont.)	B30-R10000
-	Fig. 3	B30C-1125-584-YL	Yellow	1.125 (28.6)	50 (15.2)	1 roll (cont.)	B30-R10000
-	Fig. 3	B30C-2250-584-YL	Yellow	2.250 (57.5)	50 (15.2)	1 roll (cont.)	B30-R10000
✂	Fig. 3	B30C-4000-584-YL	Yellow	4.000 (101.6)	50 (15.2)	1 roll (cont.)	B30-R10000
-	Fig. 3	B30C-1125-584-OR	Orange	1.125 (28.6)	50 (15.2)	1 roll (cont.)	B30-R10000
-	Fig. 3	B30C-2250-584-OR	Orange	2.250 (57.5)	50 (15.2)	1 roll (cont.)	B30-R10000
✂	Fig. 3	B30C-4000-584-OR	Orange	4.000 (101.6)	50 (15.2)	1 roll (cont.)	B30-R10000

BradyGlo™ High-Intensity Glow-in-the-Dark Labels

(B-526)

- For glow-in-the-dark identification up to 10 hours
- Designed for directional, evacuation and equipment marking. Ideal for marking emergency utility shut-offs, fire extinguishers, alarm pulls and vital equipment controls
- Complies with indoor use requirements specified in RS 6-1 and 6-1A of New York Local Law 26




Figure 3



Diagram	Catalog #	Color	Label Width A Inch (mm)	Roll Length B Feet (m)	Labels Per Roll	Rec. Ribbon
Fig. 3	B30C-1125-526	Luminous Green	1.125 (28.6)	50 (15.2)	1 roll (cont.)	B30-R10000
Fig. 3	B30C-2250-526	Luminous Green	2.250 (57.5)	50 (15.2)	1 roll (cont.)	B30-R10000
Fig. 3	B30C-4000-526	Luminous Green	4.000 (101.6)	50 (15.2)	1 roll (cont.)	B30-R10000

ToughWash® Washdown Resistant Labels (B-854, B-855)

- Withstands high pressure, heat, harsh chemicals and numerous washdown cycles
- Legible and long-lasting for even the toughest washdown cycles
- Ideal for use in the food and beverage industry
- B-854 offers metal detectable layer to allow detection in food stream




Diagram	Catalog #	B#	Color/ Header	Label Width A Inch (mm)	Length B Inch (mm)	Labels Per Roll	Rec. Ribbon
ToughWash Metal Detectable Material (B-854):							
Fig. 3	B30C-4000-854-YL	B-854		4.000 (101.06)	50 ft. (15.2 m)	1 roll (cont.)	B30-R6000
Fig. 3	B30C-4000-854-WT	B-854		4.000 (101.06)	50 ft. (15.2 m)	1 roll (cont.)	B30-R6000
Fig. 73	B30-25-854-OSHADA	B-854		4.000 (101.06)	6.250 (158.8)	100	B30-R6000
Fig. 73	B30-25-854-ANSIWA	B-854		4.000 (101.06)	6.250 (158.8)	100	B30-R6000
Fig. 73	B30-25-854-ANSIDA	B-854		4.000 (101.06)	6.250 (158.8)	100	B30-R6000
Fig. 73	B30-25-854-ANSICA	B-854		4.000 (101.06)	6.250 (158.8)	100	B30-R6000
ToughWash Material (B-855):							
Fig. 3	B30C-1125-855-YL	B-855		1.125 (28.6)	50 ft. (15.2 m)	1 roll (cont.)	B30-R6000
Fig. 3	B30C-2250-855-YL	B-855		2.250 (57.5)	50 ft. (15.2 m)	1 roll (cont.)	B30-R6000
Fig. 3	B30C-4000-855-YL	B-855		4.000 (101.06)	50 ft. (15.2 m)	1 roll (cont.)	B30-R6000
Fig. 3	B30C-1125-855-WT	B-855		1.125 (28.6)	50 ft. (15.2 m)	1 roll (cont.)	B30-R6000
Fig. 3	B30C-2250-855-WT	B-855		2.250 (57.5)	50 ft. (15.2 m)	1 roll (cont.)	B30-R6000
Fig. 3	B30C-4000-855-WT	B-855		4.000 (101.06)	50 ft. (15.2 m)	1 roll (cont.)	B30-R6000
Fig. 73	B30-25-855-OSHADA	B-855		4.000 (101.06)	6.250 (158.8)	100	B30-R6000
Fig. 73	B30-25-855-ANSIWA	B-855		4.000 (101.06)	6.250 (158.8)	100	B30-R6000
Fig. 73	B30-25-855-ANSIDA	B-855		4.000 (101.06)	6.250 (158.8)	100	B30-R6000
Fig. 73	B30-25-855-ANSICA	B-855		4.000 (101.06)	6.250 (158.8)	100	B30-R6000

Cold Temperature Application Labels

(B-549)

- Special adhesive permanently adheres to extremely cold surfaces
- Can be applied in -10° F and lasts in -40° F
- Ideal for cold storage warehouses, coolers, freezers and short-term winter outdoor use




Figure 3



For XY-Cutter	Diagram	Catalog #	Color	Label Width A Inch (mm)	Roll Length B Feet (m)	Labels Per Roll	Rec. Ribbon
-	Fig. 3	B30C-1125-549-WT	White	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000
-	Fig. 3	B30C-2250-549-WT	White	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000
✂	Fig. 3	B30C-4000-549-WT	White	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000
-	Fig. 3	B30C-1125-549-YL	Yellow	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R10000
-	Fig. 3	B30C-2250-549-YL	Yellow	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R10000
✂	Fig. 3	B30C-4000-549-YL	Yellow	4.000 (101.6)	100 (30.5)	1 roll (cont.)	B30-R10000

Raised Profile Labels – Engraved Plate Substitutes – Push Button Style

(B-593)

- Costs up to 80% less than engraved legend plates
- High gloss, polyester label with thick raised profile and ultra-aggressive adhesive (0.70 mm thick)
- High-performance, low-cost substitute to engraved plates
- 10-year outdoor durability rating
- 5 push button sizes (including keyed and non-keyed 22.5 mm and 30.5 mm hole dia. keyed)

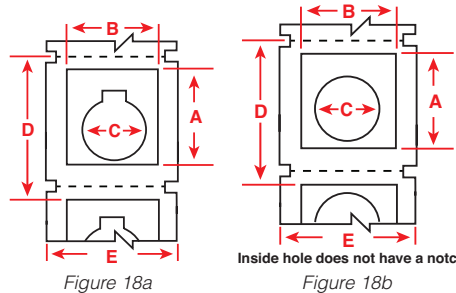


Figure 18a

Figure 18b



Diagram	Catalog #	Color	Label Height A Inch (mm)	Label Width B Inch (mm)	Hole Dia. C Inch (mm)	Vert. repeat D Inch (mm)	Web width E Inch (mm)	Labels Per Row	Labels Per Roll	Rec. Ribbon
Fig. 18a	B30EP-167-593-WT	White	1.500 (38.1)	1.200 (30.5)	0.885 (22.5)	1.750 (44.5)	2.500 (63.5)	1	200	B30-R6000
Fig. 18b	B30EP-167U-593-WT	White	1.500 (38.1)	1.200 (30.5)	0.885 (22.5)	1.750 (44.5)	2.500 (63.5)	1	200	B30-R6000
Fig. 18a	B30EP-169-593-WT	White	1.800 (45.7)	1.800 (45.7)	1.200 (30.5)	2.000 (50.8)	2.500 (63.5)	1	190	B30-R6000
Fig. 18a	B30EP-168-593-WT	White	1.900 (48.3)	1.200 (30.5)	0.885 (22.5)	2.125 (54.0)	2.500 (63.5)	1	180	B30-R6000
Fig. 18a	B30EP-170-593-WT	White	2.400 (60.9)	2.400 (60.9)	1.200 (30.5)	2.625 (66.7)	3.250 (82.6)	1	145	B30-R6000
Fig. 18a	B30EP-167-593-YL	Yellow	1.500 (38.1)	1.200 (30.5)	0.885 (22.5)	1.750 (44.5)	2.500 (63.5)	1	200	B30-R6000
Fig. 18b	B30EP-167U-593-YL	Yellow	1.500 (38.1)	1.200 (30.5)	0.885 (22.5)	1.750 (44.5)	2.500 (63.5)	1	200	B30-R6000
Fig. 18a	B30EP-169-593-YL	Yellow	1.800 (45.7)	1.800 (45.7)	1.200 (30.5)	2.000 (50.8)	2.500 (63.5)	1	190	B30-R6000
Fig. 18a	B30EP-168-593-YL	Yellow	1.900 (48.3)	1.200 (30.5)	0.885 (22.5)	2.125 (54.0)	2.500 (63.5)	1	180	B30-R6000
Fig. 18a	B30EP-170-593-YL	Yellow	2.400 (60.9)	2.400 (60.9)	1.200 (30.5)	2.625 (66.7)	3.250 (82.6)	1	145	B30-R6000
Fig. 18a	B30EP-167-593-BK	Black	1.500 (38.1)	1.200 (30.5)	0.885 (22.5)	1.750 (44.5)	2.500 (63.5)	1	200	B30-R4400-WT
Fig. 18b	B30EP-167U-593-BK	Black	1.500 (38.1)	1.200 (30.5)	0.885 (22.5)	1.750 (44.5)	2.500 (63.5)	1	200	B30-R4400-WT
Fig. 18a	B30EP-169-593-BK	Black	1.800 (45.7)	1.800 (45.7)	1.200 (30.5)	2.000 (50.8)	2.500 (63.5)	1	190	B30-R4400-WT
Fig. 18a	B30EP-168-593-BK	Black	1.900 (48.3)	1.200 (30.5)	0.885 (22.5)	2.125 (54.0)	2.500 (63.5)	1	180	B30-R4400-WT
Fig. 18a	B30EP-170-593-BK	Black	2.400 (60.9)	2.400 (60.9)	1.200 (30.5)	2.625 (66.7)	3.250 (82.6)	1	145	B30-R4400-WT
Fig. 18a	B30EP-167-593-GN	Green	1.500 (38.1)	1.200 (30.5)	0.885 (22.5)	1.750 (44.5)	2.500 (63.5)	1	200	B30-R4400-WT
Fig. 18b	B30EP-167U-593-GN	Green	1.500 (38.1)	1.200 (30.5)	0.885 (22.5)	1.750 (44.5)	2.500 (63.5)	1	200	B30-R4400-WT
Fig. 18a	B30EP-169-593-GN	Green	1.800 (45.7)	1.800 (45.7)	1.200 (30.5)	2.000 (50.8)	2.500 (63.5)	1	190	B30-R4400-WT
Fig. 18a	B30EP-170-593-GN	Green	1.900 (48.3)	1.200 (30.5)	0.885 (22.5)	2.125 (54.0)	2.500 (63.5)	1	180	B30-R4400-WT
Fig. 18a	B30EP-170-593-GN	Green	2.400 (60.9)	2.400 (60.9)	1.200 (30.5)	2.625 (66.7)	3.250 (82.6)	1	145	B30-R4400-WT
Fig. 18a	B30EP-167-593-RD	Red	1.500 (38.1)	1.200 (30.5)	0.885 (22.5)	1.750 (44.5)	2.500 (63.5)	1	200	B30-R4400-WT
Fig. 18b	B30EP-167U-593-RD	Red	1.500 (38.1)	1.200 (30.5)	0.885 (22.5)	1.750 (44.5)	2.500 (63.5)	1	200	B30-R4400-WT
Fig. 18a	B30EP-169-593-RD	Red	1.800 (45.7)	1.800 (45.7)	1.200 (30.5)	2.000 (50.8)	2.500 (63.5)	1	190	B30-R4400-WT
Fig. 18a	B30EP-168-593-RD	Red	1.900 (48.3)	1.200 (30.5)	0.885 (22.5)	2.125 (54.0)	2.500 (63.5)	1	180	B30-R4400-WT
Fig. 18a	B30EP-170-593-RD	Red	2.400 (60.9)	2.400 (60.9)	1.200 (30.5)	2.625 (66.7)	3.250 (82.6)	1	145	B30-R4400-WT

Raised Profile Labels – Engraved Plate Substitutes – Rectangular Style (B-593)

- Costs up to 80% less than engraved legend plates
- High-gloss, polyester label with thick raised profile and ultra-aggressive adhesive (0.70 mm thick)
- Ideal for front-of-panel identification as well as inside-panel backer board labels and component identification
- Costs up to 80% less than engraved plates and prints out in about 4 seconds
- 10-year outdoor durability rating




Figure 18c






Diagram	Catalog #	Color	Label Width A Inch (mm)	Label Height B Inch (mm)	Vert. Repeat D Inch (mm)	Web Width E Inch (mm)	Labels Per Row	Labels Per Roll	Rec. Ribbon
Fig. 18c	B30EP-171-593-WT	White	1.060 (26.9)	0.490 (12.5)	0.750 (19.1)	1.375 (34.9)	1	500	B30-R6000
Fig. 18c	B30EP-172-593-WT	White	1.770 (45.0)	0.590 (15.0)	0.850 (21.6)	2.500 (63.5)	1	450	B30-R6000
Fig. 18c	B30EP-175-593-WT	White	3.000 (76.2)	0.750 (19.1)	1.000 (25.4)	3.250 (82.6)	1	375	B30-R6000
Fig. 18c	B30EP-173-593-WT	White	2.000 (50.8)	1.000 (25.4)	1.250 (31.8)	2.500 (63.5)	1	300	B30-R6000
Fig. 18c	B30EP-174-593-WT	White	4.000 (101.6)	1.000 (25.4)	1.250 (31.8)	4.250 (108.0)	1	300	B30-R6000
Fig. 18c	B30EP-176-593-WT	White	3.000 (76.2)	1.000 (25.4)	1.250 (31.8)	3.250 (82.6)	1	300	B30-R6000
Fig. 18c	B30EP-177-593-WT	White	3.000 (76.2)	2.500 (63.5)	2.750 (69.9)	3.250 (82.6)	1	125	B30-R6000
Fig. 18c	B30EP-171-593-YL	Yellow	1.060 (26.9)	0.490 (12.5)	0.750 (19.1)	1.375 (34.9)	1	500	B30-R6000
Fig. 18c	B30EP-172-593-YL	Yellow	1.770 (45.0)	0.590 (15.0)	0.850 (21.6)	2.500 (63.5)	1	450	B30-R6000
Fig. 18c	B30EP-175-593-YL	Yellow	3.000 (76.2)	0.750 (19.1)	1.000 (25.4)	3.250 (82.6)	1	375	B30-R6000
Fig. 18c	B30EP-173-593-YL	Yellow	2.000 (50.8)	1.000 (25.4)	1.250 (31.8)	2.500 (63.5)	1	300	B30-R6000
Fig. 18c	B30EP-174-593-YL	Yellow	4.000 (101.6)	1.000 (25.4)	1.250 (31.8)	4.250 (108.0)	1	300	B30-R6000
Fig. 18c	B30EP-176-593-YL	Yellow	3.000 (76.2)	1.000 (25.4)	1.250 (31.8)	3.250 (82.6)	1	300	B30-R6000
Fig. 18c	B30EP-177-593-YL	Yellow	3.000 (76.2)	2.500 (63.5)	2.750 (69.9)	3.250 (82.6)	1	125	B30-R6000
Fig. 18c	B30EP-171-593-BK	Black	1.060 (26.9)	0.490 (12.5)	0.750 (19.1)	1.375 (34.9)	1	500	B30-R4400-WT
Fig. 18c	B30EP-172-593-BK	Black	1.770 (45.0)	0.590 (15.0)	0.850 (21.6)	2.500 (63.5)	1	450	B30-R4400-WT
Fig. 18c	B30EP-175-593-BK	Black	3.000 (76.2)	0.750 (19.1)	1.000 (25.4)	3.250 (82.6)	1	375	B30-R4400-WT
Fig. 18c	B30EP-173-593-BK	Black	2.000 (50.8)	1.000 (25.4)	1.250 (31.8)	2.500 (63.5)	1	300	B30-R4400-WT
Fig. 18c	B30EP-174-593-BK	Black	4.000 (101.6)	1.000 (25.4)	1.250 (31.8)	4.250 (108.0)	1	300	B30-R4400-WT
Fig. 18c	B30EP-176-593-BK	Black	3.000 (76.2)	1.000 (25.4)	1.250 (31.8)	3.250 (82.6)	1	300	B30-R4400-WT
Fig. 18c	B30EP-177-593-BK	Black	3.000 (76.2)	2.500 (63.5)	2.750 (69.9)	3.250 (82.6)	1	125	B30-R4400-WT
Fig. 18c	B30EP-171-593-GN	Green	1.060 (26.9)	0.490 (12.5)	0.750 (19.1)	1.375 (34.9)	1	500	B30-R4400-WT
Fig. 18c	B30EP-172-593-GN	Green	1.770 (45.0)	0.590 (15.0)	0.850 (21.6)	2.500 (63.5)	1	450	B30-R4400-WT
Fig. 18c	B30EP-175-593-GN	Green	3.000 (76.2)	0.750 (19.1)	1.000 (25.4)	3.250 (82.6)	1	375	B30-R4400-WT
Fig. 18c	B30EP-173-593-GN	Green	2.000 (50.8)	1.000 (25.4)	1.250 (31.8)	2.500 (63.5)	1	300	B30-R4400-WT
Fig. 18c	B30EP-174-593-GN	Green	4.000 (101.6)	1.000 (25.4)	1.250 (31.8)	4.250 (108.0)	1	300	B30-R4400-WT
Fig. 18c	B30EP-176-593-GN	Green	3.000 (76.2)	1.000 (25.4)	1.250 (31.8)	3.250 (82.6)	1	300	B30-R4400-WT
Fig. 18c	B30EP-177-593-GN	Green	3.000 (76.2)	2.500 (63.5)	2.750 (69.9)	3.250 (82.6)	1	125	B30-R4400-WT
Fig. 18c	B30EP-171-593-RD	Red	1.060 (26.9)	0.490 (12.5)	0.750 (19.1)	1.375 (34.9)	1	500	B30-R4400-WT
Fig. 18c	B30EP-172-593-RD	Red	1.770 (45.0)	0.590 (15.0)	0.850 (21.6)	2.500 (63.5)	1	450	B30-R4400-WT
Fig. 18c	B30EP-173-593-RD	Red	2.000 (50.8)	1.000 (25.4)	1.250 (31.8)	2.500 (63.5)	1	300	B30-R4400-WT
Fig. 18c	B30EP-174-593-RD	Red	4.000 (101.6)	1.000 (25.4)	1.250 (31.8)	4.250 (108.0)	1	300	B30-R4400-WT
Fig. 18c	B30EP-171-593-SL	Silver	1.060 (26.9)	0.490 (12.5)	0.750 (19.1)	1.375 (34.9)	1	500	B30-R6000
Fig. 18c	B30EP-172-593-SL	Silver	1.770 (45.0)	0.590 (15.0)	0.850 (21.6)	2.500 (63.5)	1	450	B30-R6000
Fig. 18c	B30EP-173-593-SL	Silver	2.000 (50.8)	1.000 (25.4)	1.250 (31.8)	2.500 (63.5)	1	300	B30-R6000
Fig. 18c	B30EP-174-593-SL	Silver	4.000 (101.6)	1.000 (25.4)	1.250 (31.8)	4.250 (108.0)	1	300	B30-R6000

Product Identification Materials

- A variety of polyester and specialty materials in wide 4-in. format rolls designed for shape cutting multiple labels out of a single continuous roll
- Ideal for smaller volume custom product and general identification labels
- Proven materials with agency approvals for product identification and asset tracking applications



B-424: Paper

B-423: Polyester with standard adhesive

B-428: Metallized polyester with standard adhesive for smooth surfaces

B-432: Polyester with stronger adhesive

B-434: Metallized polyester with stronger adhesive for textured surfaces

B-437: *Tedlar® for high-temp labeling and cable wraps

B-480: Non-metal polyester with rubber-based adhesive for oily / greasy surfaces

B-483: Polyester with ultra-aggressive adhesive for rough surfaces

B-484: Polyester with ultra-aggressive adhesive and pliability for angular surfaces

B-489: Polyester with ultra-aggressive adhesive for rough surfaces

B-488: Polyester with standard adhesive and chemical resistance

B-486: Metallized polyester with ultra-aggressive adhesive for rougher surfaces

B-498: Vinyl cloth

B-565: Metallized polyester with standard adhesive

B-595: Indoor / outdoor vinyl

B-724: Polyimide label for extremely high temperatures

B-727: Polyimide label for standard temperatures

B-787: Polyvinylfluoride tape

Matte bright white

Gloss white

Matte silver

Clear

Gloss silver

Matte white

Satin light gray

Gloss white

Matte white

Matte white

Matte silver

Semi-gloss white

Matte silver

Semi-gloss white

Matte amber

Gloss white

Gloss white

Service temp: -40 to 124° F

Service temp: -94 to 248° F

Service temp: -40 to 293° F

Service temp: -40 to 212° F

Service temp: -40 to 194° F

Service temp: -94 to 275° F

Service temp: -94 to 248° F

Service temp: -94 to 248° F

Service temp: -40 to 240° F

Service temp: -94 to 248° F

Service temp: -40 to 320° F

Service temp: -40 to 248° F

Service temp: -40 to 175° F

Service temp: -40 to 240° F

Service temp: -40 to 180° F

Service temp: -94 to 518° F

Service temp: -94 to 212° F

Service temp: -94 to 212° F

RoHS

RoHS

RoHS

RoHS

RoHS

RoHS

RoHS

RoHS

RoHS

RoHS

RoHS

RoHS

RoHS

RoHS

RoHS

RoHS

RoHS

RoHS

RoHS

RoHS

RoHS

RoHS

RoHS

RoHS

RoHS

RoHS

RoHS

RoHS

RoHS

RoHS

RoHS

RoHS

RoHS

RoHS

RoHS

RoHS

RoHS

RoHS

RoHS

RoHS

RoHS

RoHS

RoHS

RoHS

RoHS

RoHS

RoHS

RoHS

RoHS

RoHS

RoHS

RoHS

RoHS

RoHS

RoHS

RoHS

RoHS

For XY-Cutter	Catalog #	B#	Color	Label width A inch (mm)	Roll length B feet (m)	Labels per roll	Rec. ribbon
✂	B30C-4000-423	B-423	White	4.000 (101.6)	150 (45.7)	1 roll (cont.)	B30-R6000
✂	B30C-4000-424	B-424	White	4.000 (101.6)	150 (45.7)	1 roll (cont.)	B30-R4300
✂	B30C-4000-432	B-432	Clear	4.000 (101.6)	120 (36.6)	1 roll (cont.)	B30-R6000
✂	B30C-4000-437	B-437	White	4.000 (101.6)	150 (45.7)	1 roll (cont.)	B30-R4300
✂	B30C-4000-483	B-483	White	4.000 (101.6)	130 (39.6)	1 roll (cont.)	B30-R6000
✂	B30C-4000-484	B-484	White	4.000 (101.6)	150 (45.7)	1 roll (cont.)	B30-R6000
✂	B30C-4000-488	B-488	White	4.000 (101.6)	130 (39.6)	1 roll (cont.)	B30-R4300
✂	B30C-4000-489	B-489	White	4.000 (101.6)	130 (39.6)	1 roll (cont.)	B30-R4300
✂	B30C-4000-595-WT	B-595	White	4.000 (101.6)	100 (30.4)	1 roll (cont.)	B30-R10000
✂	B30C-4000-727	B-727	White	4.000 (101.6)	130 (39.6)	1 roll (cont.)	B30-R6000
✂	B30C-4000-498	B-498	White	4.000 (101.6)	80 (24.4)	1 roll (cont.)	B30-R6200
✂	B30C-4000-787	B-787	White	4.000 (101.6)	60 (18.3)	1 roll (cont.)	B30-R6000
✂	B30C-4000-724	B-724	Amber	4.000 (101.6)	130 (39.6)	1 roll (cont.)	B30-R4300
✂	B30C-4000-480	B-480	Light Gray	4.000 (101.6)	115 (35.1)	1 roll (cont.)	B30-R6000
✂	B30C-4000-428	B-428	Silver	4.000 (101.6)	130 (39.6)	1 roll (cont.)	B30-R4300
✂	B30C-4000-434	B-434	Silver	4.000 (101.6)	130 (39.6)	1 roll (cont.)	B30-R6000
✂	B30C-4000-486	B-486	Silver	4.000 (101.6)	115 (35.1)	1 roll (cont.)	B30-R4300
✂	B30C-4000-565-SL	B-565	Silver	4.000 (101.6)	100 (30.4)	1 roll (cont.)	B30-R10000

*Tedlar is a registered trademark of E.I. DuPont De Nemours and Company

Tamper-Evident Asset ID Labels

(B-438)

- Leaves checkerboard footprint on surface and on label if removed to prevent re-use




Figure 5




Figure 6




Diagram	Catalog #	Color	Label Width A Inch (mm)	Label Height B Inch (mm)	Labels Per Roll	Rec. Ribbon
Fig. 5	B30-17-438	Matte Silver	2.000 (50.8)	1.000 (25.4)	1225	B30-R4300
Fig. 5	B30-18-438	Matte Silver	3.000 (76.2)	1.000 (25.4)	1225	B30-R4300
Fig. 5	B30-222-438	Matte Silver	3.000 (76.2)	2.000 (50.8)	650	B30-R4300
Fig. 6	B30C-3000-438-SL	Matte Silver	3.000 (76.2)	100 ft. (30.5 m)	1 roll (cont.)	B30-R4300

Metallized Polyester Labels

(B-565)

- For product labeling, asset tracking and general industrial identification
- Ideal for serial number plates and rating plates with name-plate quality and metal-looking finish



Catalog #	Color	Label Width A Inch (mm)	Label Height B Feet (m)	Labels Per Roll	Rec. Ribbon
B30C-1125-565-SL	Matte Silver	1.125 (28.6)	100 (30.5)	1 roll (cont.)	B30-R4300
B30C-2250-565-SL	Matte Silver	2.250 (57.5)	100 (30.5)	1 roll (cont.)	B30-R4300

Standard Adhesion Polyester Labels

(B-423)

- For general purpose identification, product labels and post-process circuit board identification
- Adheres best to flat, smooth surfaces. Consult technical data sheet for UL / CSA ratings and complete performance and testing details




Figure 3a



Diagram	Catalog #	Color	Label Width A Inch (mm)	Label Height B Inch (mm)	Web Width E Inch (mm)	Labels Per Row	Rec. Ribbon
Fig. 3a	B30C-2000-423	Gloss White	2.000 (50.8)	100 ft. (30.5 m)	2.250 (57.2)	1 roll (cont.)	B30-R6000
Fig. 3a	B30C-3000-423	Gloss White	3.000 (76.2)	100 ft. (30.5 m)	3.250 (82.6)	1 roll (cont.)	B30-R6000

Standard Adhesion Metallized Polyester Labels (B-428)

- For labeling applications where a metal label or metal appearance is required
- Ideal for rating plates and product labels
- Adheres best to flat, smooth surfaces
- Consult technical data sheet for UL / CSA ratings and complete performance and testing details




Diagram	Catalog #	Color	Label Width A Inch (mm)	Label Height B Inch (mm)	Web Width E Inch (mm)	Labels Per Row	Rec. Ribbon
Fig. 3a	B30C-2000-428	Matte Lt. Gray	2.000 (50.8)	100 ft. (30.5 m)	2.250 (57.2)	1 roll (cont.)	B30-R4300

High Adhesion Metallized Polyester Labels (B-434A)

- Ideal for rating plates and product labels
- Adheres best to flat and smooth or textured surfaces or when extra adhesion is required
- Consult technical data sheet for UL / CSA ratings and complete performance and testing details




Diagram	Catalog #	Color	Label Width A Inch (mm)	Label Height B Inch (mm)	Web Width E Inch (mm)	Labels Per Row	Rec. Ribbon
High gloss silver metallized polyester with high adhesion for textured surfaces (B-434A)							
Fig. 3a	B30C-2000-434	Gloss Silver	2.000 (50.8)	100 ft. (30.5 m)	2.250 (57.2)	1 roll (cont.)	B30-R6000
Fig. 3a	B30C-3000-434	Gloss Silver	3.000 (76.2)	100 ft. (30.5 m)	3.250 (82.6)	1 roll (cont.)	B30-R6000

Ultra Aggressive Adhesive High Temp and Chemical Resistant Polyester Labels (B-443)

- For labeling applications where chemical-resistance, self-extinguishing and short-term high-temp properties are required
- Superior resistance to chemicals and fluids that do not have a high pH value
- Excellent long-term temperature resistance and very high short-term temperature resistance to 410°F
- Best for flat and smooth or textured surfaces
- Consult technical data sheet for complete testing and performance details




Diagram	Catalog #	Color	Label Width A Inch (mm)	Label Height B Inch (mm)	Web Width E Inch (mm)	Labels Per Row	Rec. Ribbon
Fig. 3a	B30C-2000-443	Matte White	2.000 (50.8)	100 ft. (30.5 m)	2.250 (57.2)	1 roll (cont.)	B30-R6400
Fig. 3a	B30C-3000-443	Matte White	3.000 (76.2)	100 ft. (30.5 m)	3.250 (82.6)	1 roll (cont.)	B30-R6400
Fig. 3a	B30C-4000-443	Matte White	4.000 (101.6)	100 ft. (30.5 m)	4.250 (107.6)	1 roll (cont.)	B30-R6400

Paper Labels

(B-424)

- Economical choice for light duty part labeling, box labels and general identification
- Bright white finish with excellent image contrast and smear resistance for barcode printing




Figure 3a



Diagram	Catalog #	Color	Label Width A Inch (mm)	Label Height B Inch (mm)	Web Width E Inch (mm)	Labels Per Row	Rec. Ribbon
Fig. 3a	B30C-3000-424	White	3.000 (76.2)	150 ft. (45.8m)	3.250 (82.6)	1 roll (cont.)	B30-R4300

Transfer Tape, Translucent White, 4.25"

- Transfers printed shapes or text directly from the liner to the final surface without losing spacing or alignment
- Minimizes errors and material waste by allowing for precise label placement on the first attempt
- Translucent white finish offers a clean, professional look that blends well with most surfaces while remaining visible
- Large roll size offers a long-lasting supply
- Easy to use



Catalog #	Description	Color	Label Width	Qty.
76737	Transfer Tape	Translucent White	4.25"	1 Roll



Place



Cut



Peel



Apply



Finish

Printer specifications

Description	Facility, safety and Lean / 5S printer for walk-up-and-print ease of use, fast supply changeovers, multicolor printing and ability to cut out text and shapes. Best choice for "lean event" labeling situations and multiple user locations because it has a very approachable interface and very fast supply changeovers.		
Applications	Facility and safety ID, signs, pipe markers, Lean / 5S, arc flash labels, GHS and chemical labels, equipment labels, hazard communication identification, inventory and inspection labeling, temporary labeling, warehouse marking, panel and push-button labels, reflective and glow-in-the-dark labels, tags, magnetic, cold-temp labeling. Cut out text and shapes.		
Printer catalog number	S3700		
Label material types	Extremely aggressive 8 to 10 year outdoor vinyl with high tack and chemical resistance, plus ToughStripe® floor tape, wash-down material, 10-hr glow in the dark, reflective, magnetic, tags, engraved plate substitute and 30 other materials.		
Includes	Printer, power cord, USB cable, cleaning kit, quick start guide, BradyWorkstation software		
Warranty	5 year		
Features			
Print resolution	300 dpi	Cutter type	Auto cutter. XY cutter.
Color printing capability	Multi-color	Media sensor adjustment	Not Required
Maximum print speed	5 in. / sec		
Interface			
Display type	Color touchscreen	Supply remaining gauge	Yes
Display size	3.42 in x 6.11 in	Languages	English, Spanish, Portuguese, French
Keyboard type	Full size QWERTY	Units	Inches, millimeters, points
Stand-alone apps and editing			
Built-in label wizards	Custom label GHS / CLP Safety signs Pipe marker Arc flash	Circle gauge Gradient scale Right-to-know WHMIS Tags	General templates Quick label PreMade
Fonts, graphics, symbols			
Font sizes	4 pt (minimum)	Symbols categories	Arrows, Fire Safety, First Aid/Rescue, Hazardous Transport, Hazmat GHS / CLP, Hazmat HSID, Imported Graphics, ISO Graphics, Mandatory
Font styles	Arial, Arial 65, Courier New, Tahoma, Times New Roman, MS Gothic, Trechuchet MS, Verdana plus more with Brady Workstation. TrueType fonts storable to printer	Barcode symbologies — linear	Code 39 Code 128 Auto Interleaved 2 of 5 EAN-13 UPC-A More through Brady WorkStation
Symbols quantity	664	Barcode symbologies — 2D	QR Code PDF417
Media / supplies information			
Compatible media	B30 Series	Ribbon and label installation	Media: Supplied in cartridge, drops into place, 20 sec changeover Ribbon: Supplied in cartridge, snaps into place, 20 sec changeover
Compatible ribbons	R10000	Custom media parts available	No
Die-cuts vs continuous	Continuous tapes, pre-printed die-cut labels, general die-cut labels	Media widths	0.5 to 4 in
Software and connectivity			
Connectivity options	Stand-alone use, Ethernet, USB, Mobile device connected, PC connectable (optional)		
Software compatibility	Brady Workstation		
Physical / operational characteristics			
Dimensions	11 in. H x 19 in. W x 14.25 in. D	Operating humidity range	15% to 80% RH Non-Condensing
Weight	36.9 lbs.	Storage humidity range	15% to 90% RH Non-Condensing
Operating temperature range	50° to 104°F	Power supply voltage	110V - 240V
Storage temperature range	-4° to 122°F	Auto shutoff / Power conserve	Yes
Agency approvals / regulatory compliance			
Enables industry compliance	USA and Canada - cULc Europe - CE (including Eu RoHS) Argentina - UL-AR and S Mark Mexico - UL NOM CoC	Australia - RCM mark Russia - EAC Korea - KC China - CCC and RoHS India - BIS Taiwan - BSMI Exemption South Africa - LOA and SABS (No logo on product label)	
U.S. patents	Multiple U.S. Patents Apply Printers: 6364552 B1; 6788324; 6768502 B2 BBP37 Printer only: 6664995 B2; Ribbon cartridges: 6860658 B2; D480749		



We make products that make the world a safer and smarter place. From the depths of the ocean to outer space, from the factory floor to the delivery room — **we're just about everywhere you look.**

► For more information or to learn more about our innovative products, visit BradyID.com or call 1-888-272-3946.

USA
Customer Service: 1-888-272-3946
BradyID.com

Canada
Customer Service: 1-800-263-6179
BradyCanada.ca

Mexico
Customer Service: 1-800-262-7777
Inside Sales: 1-800-262-7777 ext 177
BradyID.com.mx



Y5267012 MS5267012